


DS7433 8-Input Module

Prod. ID

DS7433

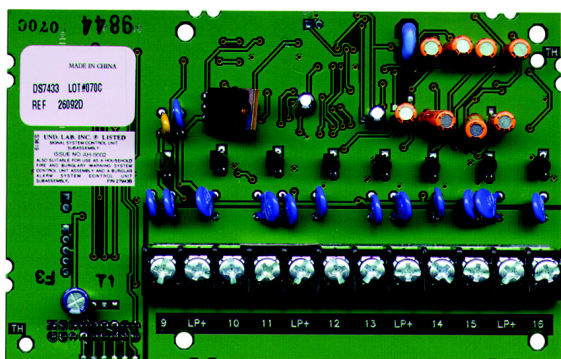

The DS7433 is an 8-input Module for use with the DS7400Xi Series Control/Communicators. It connects directly to the control/communicator and is designed to expand it to sixteen hard-wired points. The expansion points 9-16 are intended for the connection of normally open or normally closed alarm contacts. These points may also be used with compatible two-wire smoke detectors. One DS7433 may be used per DS7400Xi system.

■ Technical Specifications

Compatible Panels	DS7400Xi Series
Power Requirements	
Current Draw:	65 mA standby; 80 mA with one point in alarm, add 15 mA for each additional point in alarm
EOL Resistor:	2.21 kilohm
Loop Impedance:	60 ohms maximum
Voltage (Operating):	12 VDC nominal

