


16-RELAY EXPANSION BOARD

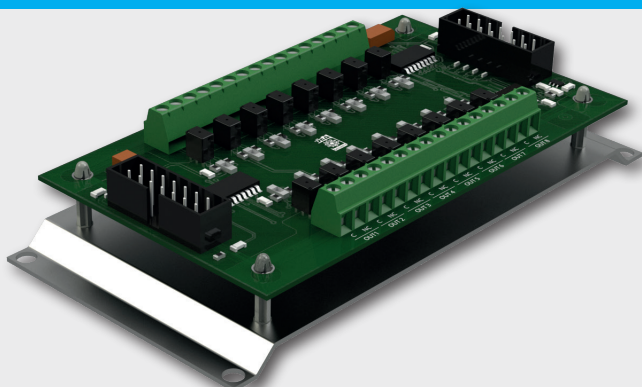

P/N BR-XS-16L

DESCRIPTION

16-relay expansion board to make the alarm signals available through C/NC contacts. All the relay outputs can be programmed via software from BR-XS-CTRL32 or BR-XS-CTRL64 CONTROLLER boards.

COMPLIANCES (IF CONNECTED TO BR-XS-CTRL32/64)


- DIRECTIVE 2014/30/EU
- EN 50130-4:2011 + A1:2014
- EN61000-6-3:2007 + A1:2011



TECHNICAL FEATURES


- DIMENSIONS:** 130 x 64 x 29 mm (L x H x W)
- PACKAGING DIMENSIONS:** 145 x 70 x 67 mm (L x H x W)
- GROSS WEIGHT:** 78 g
- POWER SUPPLY:** from BR-XS-CTRL32 / 64
- CURRENT:** 30 mA (max)
- OPERATING TEMPERATURE:** -25 ÷ +80 °C
- RELATIVE HUMIDITY:** <95% non condensing
- C/NC RELAY OUTPUTS:** 16-relay outputs programmable from Controller board
- CONNECTION:** to BR-XS-CTRL32 and BR-XS-CTRL64 by flat cable

GENERAL SCHEME

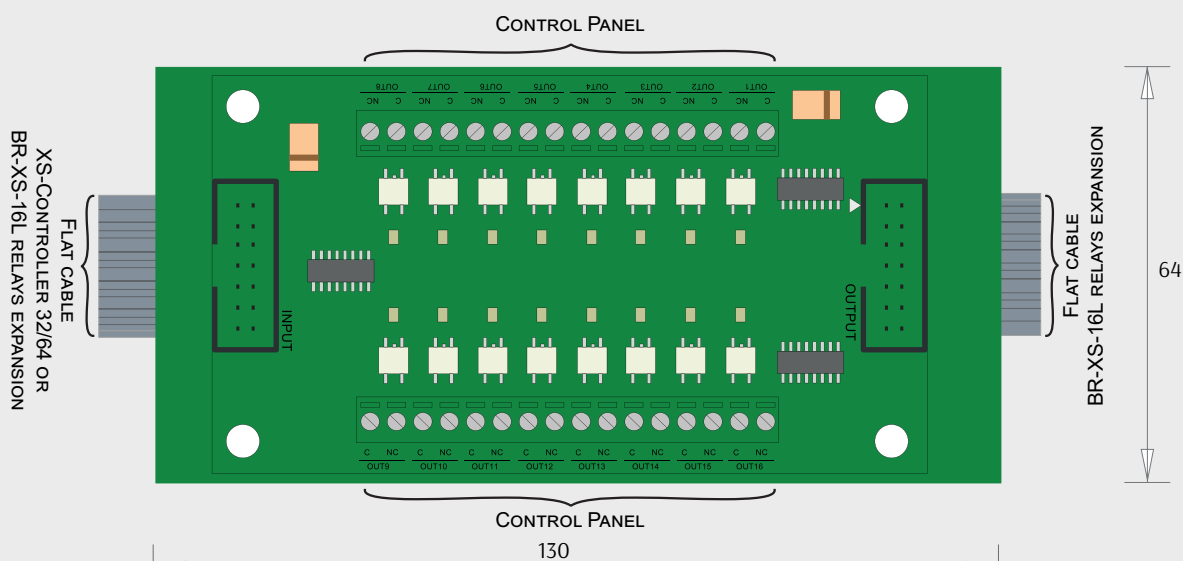

BR-XS-CTRL32/64 CONNECTION


The INPUT port of BR-XS-RE16L must be connected to CN1 (I/O EXPANSION) port of the BR-XS-CTRL32/64 board using a 14-pin flat cable. Further relay expansions must be connected in cascade to the previous expansion maintaining an OUTPUT-INPUT correspondence. BR-XS-RE16L boards can be managed only from BR-XS-CTRL32 and BR-XS-CTRL64 controller boards. Each BR-XS-CTRL32 can manage up to 4 BR-XS-RE16L (64 programmable relays). Each BR-XS-CTRL64 can manage up to 6 BR-XS-RE16L (96 programmable relays). The distance between BR-XS-CTRL32/64 Outputs or BR-XS-RE16L Outputs and the CONTROL PANEL must not exceed 3 m.

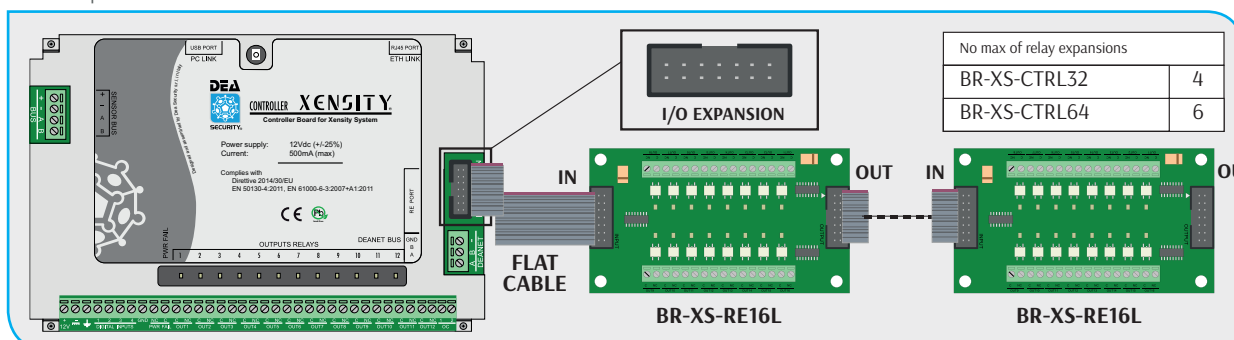



CONTROL PANEL CONNECTION

To connect XENSITY system to the control panel you can use BR-XS-CTRL32/64 or Relay Expansion Outputs. The outputs are wired directly to the zones of the control panel (if supported) or through a balanced line. The maximum distance between the relay outputs and the alarm control inputs must not exceed 3 m.

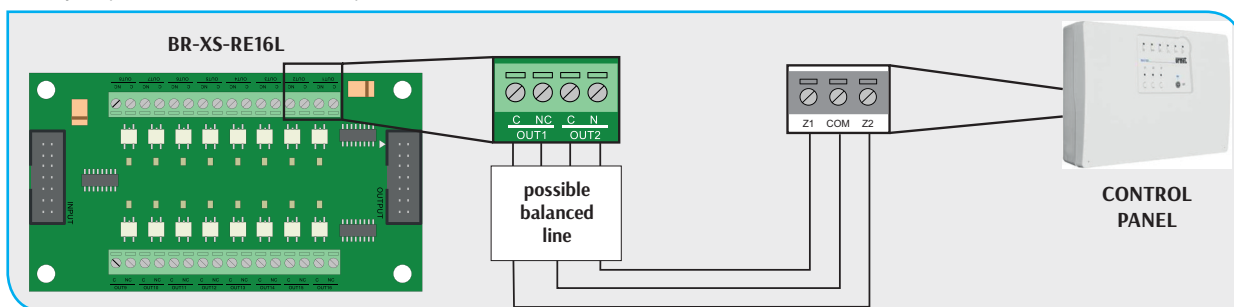

DEVICE AND RELAY EXPANSIONS ACQUISITION

Once terminated sensors and relay expansion boards installation, connect sensor buses and expansions to BR-XS-CTRL32/64 controller.

It is necessary to proceed with the acquisition of the various devices available in the XENSITY buses. For the first acquisition use only a wired connection with

BR-XS-CTRL32/64 board, the wireless connection is not recommended at this early stage.

Enter Login credentials (default username: installatore, default password: dea, default board password: 123456) and Enter Configuration mode. Acquire

sensors and peripheral devices clicking on Controller Icon in the tree shown in "Available Sensors" windows and clicking "Acquisition" button. Once finished

loading, expand the branch of the bus tree to see all the devices Connected, repeat for each bus. To acquire relay expansions, select the label "Relay Board"

and click "BR-XS-RE16L Acquisition" button. Once finished loading, expand the branch in XS-ER16L node to see all the expansions connected.



RELAY CONFIGURATION

Once acquired the expansion boards, you can associate each relay to one or more activation causes. To do this double-click on the desired expansion board and drag and drop an object of the left windows on the relay to program in the right window. For further information, refer to BR-XS-CTRL32/64 Software Manual.

N.B.

YOU MUST INSTALL BR-XS-RE16 BOARD INSIDE A CASE PROTECTED AGAINST OPENING (E.G: POLYESTER CABINET JUNCTION BOX, ETC.)

THE OUTDOOR INSTALLATION IS POSSIBLE ONLY USING A WATERPROOF CABINET. TO USE THE APPARTUS OUTSIDE THE TEMPERATURE AND HUMIDITY RANGE DECLARED IT IS NECESSARY TO PROVIDE THE AIR CLIMATIZATION TO THE CABINET.

DEA SECURITY RECOMMENDS TO SUBMIT ALL PRODUCTS TO PERIODIC FUNCTIONAL CHECKS TO IMPROVE MAXIMUM EFFICIENCY OF THE SYSTEM .

DEA Security S.r.l.

Via Bolano, snc - 19037 Santo Stefano di Magra (SP) - tel. +39 0187 699233 - fax +39 0187 697615

VAT NO.: IT00291080455

www.deasecurity.com - dea@deasecurity.com

