

# IPR512- GPRS/IP Monitoring Receiver

## Version 2.65

### Addendum

The following information has not been included in the IPR512 Operations Manual and Quick Guide. The information detailed in this addendum applies to IPR512 Version 2.65

### Modules Display in the Account Web Page

All modules are sorted by account number and the number of modules per page can be modified from 10 to 40.

| Accounts                                    |                                               |                                                  |                                                       | Filtering options |           | Modules sorted by accounts |                    |                 |                    |  | Edit | Delete |
|---------------------------------------------|-----------------------------------------------|--------------------------------------------------|-------------------------------------------------------|-------------------|-----------|----------------------------|--------------------|-----------------|--------------------|--|------|--------|
| <input checked="" type="radio"/> Online (5) | <input checked="" type="radio"/> Offline (14) | <input checked="" type="radio"/> Must Update (4) | <input checked="" type="radio"/> Combo (8)            |                   |           |                            |                    |                 |                    |  |      |        |
| Account #                                   | Panel                                         | Panel SN                                         | Security profile                                      | IP device         | Device SN | Module ID                  | Last poll time     | Last IP address | Registered on      |  |      |        |
| <input checked="" type="radio"/> 0001       | EVOHD V1.11                                   | 07000AE1                                         | Maximum Security (90 sec)                             | PCS250 V2.06      | 7B00DB65  | 00:19:BA:01:EC:AD          | 10-Sep-14 09:59:32 | 74.198.20.187   | 03-Sep-14 09:37:37 |  |      |        |
| <input checked="" type="radio"/> 0001       | EVOHD V1.11                                   | 07000AE1                                         | Maximum Security (90 sec)                             | PCS250G V2.06     | 7B107B68  | 00:19:BA:03:60:C6          | 10-Sep-14 10:58:46 | 74.198.23.50    | 10-Sep-14 10:14:19 |  |      |        |
| <input checked="" type="radio"/> 0100       | EVOHD V1.01                                   | -----                                            | <input checked="" type="radio"/> Low Security (5 min) | IP100 V5.20       | -----     | 00:19:BA:00:17:45          | 17-Feb-14 16:21:25 | 192.168.1.163   | 17-Feb-14 16:10:05 |  |      |        |
| <input checked="" type="radio"/> 1008       | EVO192 V2.20                                  | -----                                            | <input checked="" type="radio"/> Low Security (5 min) | IP100 V5.20       | -----     | 00:19:BA:00:5E:FE          | 28-Apr-14 12:57:11 | 192.168.1.63    | 24-Apr-14 14:15:35 |  |      |        |
| <input checked="" type="radio"/> 1111       | GN300 V1.01                                   | 0A0007B9                                         | High Security (10 min)                                | IP150 V1.32       | 710020DE  | 00:19:BA:01:AE:01          | 27-Nov-14 11:57:48 | 192.168.1.180   | 13-Nov-14 09:16:46 |  |      |        |
| <input checked="" type="radio"/> 2111       | EVOHD V1.11                                   | 07000AE1                                         | No Supervision                                        | IP150 V1.31       | 71000D70  | 00:19:BA:01:6F:44          | 06-Nov-14 13:54:19 | 192.168.1.1     | 05-Nov-14 16:18:53 |  |      |        |
| <input checked="" type="radio"/> 2111       | EVOHD V1.11                                   | 07000AE1                                         | No Supervision                                        | PCS250 V2.11      | 7B0086EC  | 00:19:BA:01:A9:75          | 06-Nov-14 14:02:33 | 74.198.16.47    | 05-Nov-14 16:19:06 |  |      |        |
| <input checked="" type="radio"/> 2222       | GN300 V0.00                                   | 0A0007B9                                         | High Security (10 min)                                | PCS250G V2.06     | 7B00E5DE  | 00:19:BA:01:06:5A          | 11-Nov-14 14:57:56 | 74.198.16.32    | 11-Nov-14 09:53:00 |  |      |        |
| <input checked="" type="radio"/> 3131       | EVO192 V2.90                                  | 05013CF8                                         | Low Security (5 min)                                  | PCS250 V2.11      | 7B000000  | 00:19:BA:00:C8:70          | 23-Oct-14 11:30:00 | 74.198.17.11    | 23-Oct-14 10:10:59 |  |      |        |
| <input checked="" type="radio"/> 5052       | MG6250 V1.54                                  | -----                                            | No Supervision                                        | MG6250 V1.54      | -----     | 64:B1:0D:89:00:02          | 15-Apr-14 11:23:23 | 74.198.17.180   | 15-Apr-14 10:36:29 |  |      |        |
| <input checked="" type="radio"/> 5551       | MG5050 V4.97                                  | 21082133                                         | No Supervision                                        | PCS250 V1.40      | 7B002535  | 00:19:BA:01:22:43          | 08-Mar-14 15:17:07 | 74.198.21.198   | 07-Mar-14 08:09:41 |  |      |        |
| <input checked="" type="radio"/> 5551       | MG5050 V4.97                                  | 21082133                                         | <input checked="" type="radio"/> Low Security (5 min) | IP150 V18.12      | 71000D72  | 00:19:BA:01:92:4C          | 10-Sep-14 05:22:51 | 192.168.1.1     | 19-Aug-14 10:11:56 |  |      |        |
| <input checked="" type="radio"/> 5555       | EVO192 V3.00                                  | 05013AB5                                         | High Security (10 min)                                | PCS250G V2.12     | 7B1115CE  | 00:19:BA:04:55:95          | 05-Dec-14 14:16:45 | 74.198.22.108   | 05-Dec-14 12:22:17 |  |      |        |
| <input checked="" type="radio"/> 6251       | MG6250 V1.60                                  | 02009E15                                         | Maximum Security (90 sec)                             | MG6250 V1.60      | 02009E15  | 64:B1:15:9E:00:02          | 22-Jul-14 12:02:56 | 74.198.21.90    | 22-Jul-14 10:37:38 |  |      |        |
| <input checked="" type="radio"/> 6253       | MG6250 V1.54                                  | -----                                            | No Supervision                                        | MG6250 V1.54      | -----     | 64:B1:F9:88:00:02          | 14-Apr-14 08:35:19 | 74.198.19.17    | 14-Apr-14 08:11:46 |  |      |        |
| <input checked="" type="radio"/> 6254       | MG6250 V1.60                                  | 02009E14                                         | Maximum Security (90 sec)                             | MG6250 V1.60      | 02009E14  | 64:B1:14:9E:00:02          | 22-Jul-14 15:31:52 | 74.198.20.34    | 22-Jul-14 15:21:24 |  |      |        |
| <input checked="" type="radio"/> 6625       | MG6250 V1.60                                  | 020072E0                                         | <input checked="" type="radio"/> Low Security (5 min) | MG6250 V1.60      | 020072E0  | 64:B1:E0:72:00:02          | 17-Apr-14 07:58:58 | 74.198.19.237   | 04-Apr-14 11:21:59 |  |      |        |
| <input checked="" type="radio"/> 7771       | UC300 V1.10                                   | 0A001709                                         | High Security (10 min)                                | IP150 V1.32       | 7101F34E  | 00:19:BA:04:4F:FD          | 20-Jan-15 10:51:18 | 192.168.1.1     | 19-Jan-15 15:01:52 |  |      |        |
| <input checked="" type="radio"/> 7771       | UC300 V1.10                                   | 0A001709                                         | High Security (10 min)                                | PCS250G V2.12     | 7B1024F4  | 00:19:BA:02:96:E8          | 20-Jan-15 11:36:20 | 74.198.20.147   | 19-Jan-15 15:02:02 |  |      |        |

Accounts per page: 20 1 of 1

P ▲ R ▲ D O X™

Figure 1: Accounts Web Page

### Export Accounts

Exporting the IPR512 accounts to a CSV file format is performed through the Status web page.

To export accounts follow the steps below:

1. Select **Receiver Status** from the Main Menu.

|                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Main menu</b><br><a href="#">Accounts</a><br><a href="#">Security profiles</a><br><a href="#">Receiver configuration</a><br><a href="#">Event configuration</a><br><b>► Receiver status</b><br><a href="#">View/Restore deleted modules</a><br><a href="#">Change password</a> | <b>Search</b><br><input type="radio"/> Account # from <input type="text"/> to <input type="text"/><br><input type="radio"/> Account # <input type="text"/><br><input type="radio"/> Module ID <input type="text"/><br><input checked="" type="radio"/> Show all accounts<br><input type="button" value="Go"/> | <b>Receiver info</b><br>ID- Line: 35-35<br>Version: 2.64.005<br>Date: 03-Feb-2015<br>Time: 14:14<br>Accounts used: 15 of 1024<br>Profiles used: 6 of 32<br>Deleted modules: 0 of 5<br> <a href="#">Troubles occurring</a> |
| <a href="#">Logout</a>                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                |

Figure 2: Selecting Receiver Status

2. Select **Export Accounts** from the Additional Actions section of the Receiver Status window.

Receiver status

Receiver is experiencing 1 troubles.

| Status | Trouble group | Trouble description                              |
|--------|---------------|--------------------------------------------------|
|        | Serial        | Cannot communicate with the automation software. |

Receiver Information

| Serial # | MAC address |      |      | Firmware                 |                            | Bootloader | Hardware | Registered on |
|----------|-------------|------|------|--------------------------|----------------------------|------------|----------|---------------|
|          | LAN         | WAN1 | WAN2 | Current version          | Check for latest version   |            |          |               |
|          |             |      |      | V2.64.005<br>01-Dec-2014 | <a href="#">Click here</a> | V2.05.003  | V1.01    | 31-Jan-2014   |

Additional Actions

Export System Log

Export Accounts

Backup on SD Card

Clear Database

Restore Factory Settings

Figure 3: Receiver Status Window

3. Select the resulting file format from the drop-down menu, the default format is Excel.

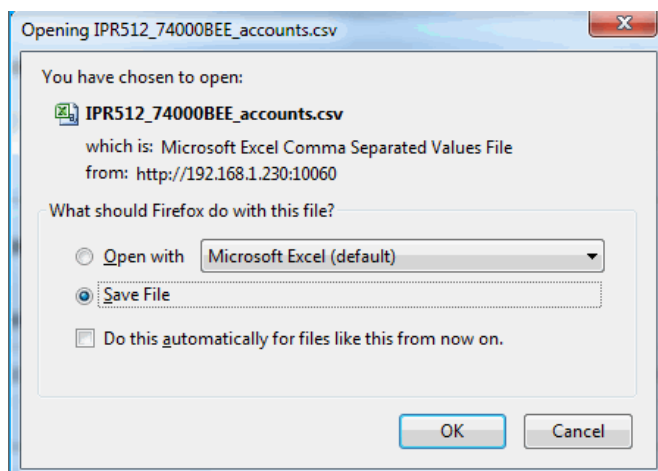


Figure 4: Exporting Accounts

4. Click **OK** to complete the exporting process.

## Backup Accounts

Backing up the accounts and the IPR512 programming is performed through the Status web page. To back-up the accounts follow the steps below:

1. Select **Receiver Status** from the Main Menu, see Figure 2 on page 1.
2. Select **Backup on SD Card** from the Additional Actions section of the Receiver Status window, see Figure 3 on page 2

The saving progress is shown on the IPR512 LCD display. Once completed, an "Action completed" message appears on the web page.

3. Click **OK** to complete the backup action.

## Clear Database

Clearing the database is performed through the *Additional Actions* section of the Receiver Status window, see Figure 3 on page 2. To delete all IPR512 accounts follow the steps below:

1. Select **Receiver Status** from the Main Menu, see Figure 2 on page 1.
2. Select **Clear Database** from the, see Figure 3 on page 2.

A dialogue box prompts you to confirm the database deletion:

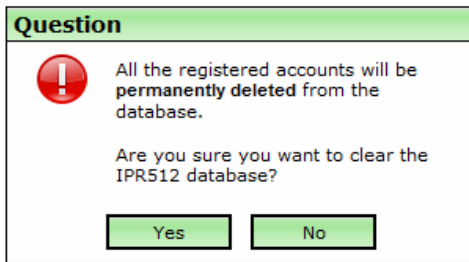


Figure 5: Clearing Database Confirmation Window

3. Click **Yes** to confirm deletion of the database.

## Restore factory Settings

Restoring factory settings is performed through the Additional Actions section of the Receiver Status window, see Figure 3 on page 2

To restore factory settings of the IPR512 follow the steps below:

1. Select **Receiver Status** from the Main Menu, see Figure 2 on page 1.
2. Select **Restore Factory Settings**, see Figure 3 on page 2.

A dialogue box prompts you to confirm restore to factory settings action:

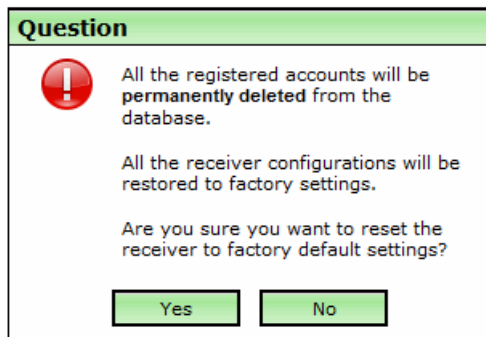


Figure 6: Restore Factory Settings

3. Click **Yes** to confirm the restore action.

