

PEOPLE COUNTING

Out of Box




The Wisenet People Counting
SND-6084/FPC camera comes
with a Facit pre-installed
Application

People Counting – with bi-directional perspective mode

People counting typical usage

includes retail analysis for store efficiency by calculating the ratio of people entering a retail environment versus actual sales at POS. It can also be used to manage resource levels effectively at checkout by measuring patterns of individual sales peaks and troughs.

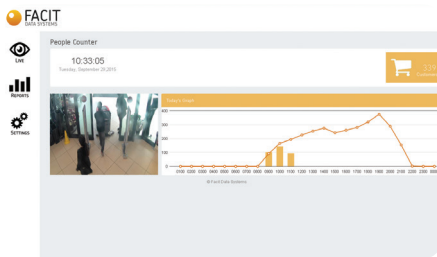

Perspective mode

is a unique feature. All other people counters have to be positioned vertically above an entrance to count accurately. The Wisenet SND-6084/FPC can be placed at an angle, so the camera can have dual use for security surveillance as well as counting people for sales & marketing data.

Configuration & management

is designed to be operator friendly while the systems' reporting gives you a dashboard view of critical activity across your retail environments.

The Wisenet SND-6084/FPC camera

has been certified and tested by Facit.

Web based user interface

enables remote software set up & configuration.

Network integration

allows real-time counts over the network.

Automated Reporting

can be set up daily, weekly or monthly.

Report delivery

by email or FTP.

Real time graphs

with hourly, daily and weekly breakdown.

Performance comparison

by plotting the average.

Trend analysis

with single view weekly reporting.

SND-6084/FPC

2MP Full HD Network Dome Camera

Specifications


- Max. 2M (1920 x 1080) resolution
- 0.03Lux@F1.2 (Color), 0.002Lux@F1.2 (B/W)
- 3 ~ 8.5mm (2.8x) motorized varifocal lens
- H.264, MJPEG dual codec, Multiple streaming
- WDR (120dB), Simple focus (Motorised V/F), P-Iris, Defog
- Audio / Face / Motion detection
- Multi-crop streaming
- SD/SDHC/SDXC memory slot
- PoE, UPnP, Bi-directional audio support



SND-6084/FPC	
TO ACHIEVE 90%+ ACCURACY HARDWARE NEEDS TO BE SET AS FOLLOWS:	
Min height/distance of lens to entrance/floor	3m height at 2.5m distance
Max height/distance of lens to entrance/floor	4m height at 3.5 distance
Report storage over 12 months activity and reporting can be stored with an on-board micro SD card	

Dimensions

Unit : mm (inch)

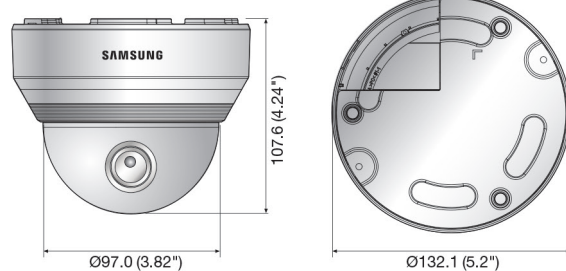

Accessories (optional)

