

RESISTENZA
RESISTOR
22K
ROSSO-ROSSO-ARANCIO
RED-RED-ORANGE



LEGENDA/LABEL:


- 29600-378 BARRIERA GALVANICA / GALVANIC BARRIER
- MODULO EM34XX / EM34xx MODULE
- ORB-MB-50018 BASE PER RIVELATORI I.S. / I.S. TIMESAVER BASE
- 53832-070 RIPETITORE OTTICO / REMOTE INDICATOR
- 55100-031 PULSANTE IS /IS MANUAL CALL POINT
- BARRIERA ZENER PER SIRENE I.S. / ZENER BARRIER FOR I.S. SOUNDERS
- SIRENA I.S. / I.S. SOUNDERES
- STAZIONE DI ALIMNTAZIONE / POWER SUPPLY STATION

NOTE:

Se viene utilizzato un cavo schermato la continuità dello schermo dovrebbe essere mantenuta e lo schermo deve essere collegato a terra solo in un punto. Il punto di messa a terra deve essere preferibilmente vicino alla barriera di sicurezza.

NOTE:

If screened cable is used screen continuity should be maintained and the screen should be earthed only at one point. The earthing point should preferably be close to the safety barrier.

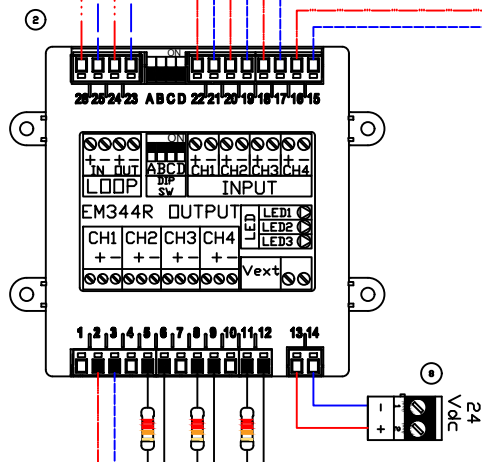


RESISTENZA
RESISTOR
22K
ROSSO-ROSSO-ARANCIO
RED-RED-ORANGE



DIODO
DIODE
1N4007

AREA SICURA / SAFE AREA

AREA CLASSIFICATA / HAZARDOUS AREA

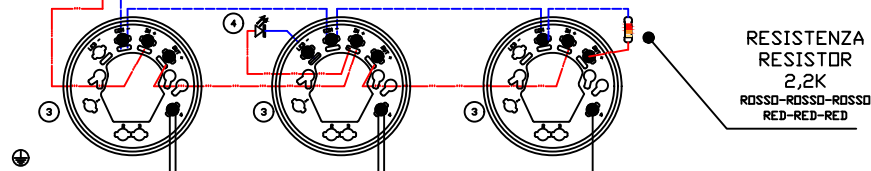

RESISTENZA
RESISTOR
2,2K
ROSSO-ROSSO-ROSSO
RED-RED-RED



RESISTENZA
RESISTOR
2,2K
ROSSO-ROSSO-ROSSO
RED-RED-RED

inim
ELECTRONICS
[Http://www.inim.biz](http://www.inim.biz)

EM34XX-ATEX

REV.
1.0

DATA