




Camera IP 4K Bullet ottica motorizzata 3.7~11mm

Camera IP 4K, Bullet da esterno/interno IP67 con analisi video integrata, sensore CMOS progressivo 1/1.8", H265+/H264, ICR meccanico, risoluzione 8Mp con 25Fps, ICR auto, ottica motorizzata 3.7~11mm, luminosità 0.004Lux f1.9 (0 con Led ON), led IR portata fino a 60mt, 1 LAN 10/100Mbps, 1 ingresso e 1 uscita allarme, 1 ingresso e 1 uscita audio, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc o PoE <14.3W.

CARATTERISTICHE TECNICHE

Camera	NBV804K				
Image Sensor	1/1.8" 8Megapixel progressive CMOS				
Effective Pixels	3840(H) x 2160(V)				
RAM/ROM	512MB/128MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s				
Minimum Illumination	0.004Lux/F1.9 (Color, 1/3s, 30IRE) 0.09Lux/F1.9 Color, 1/30s, 30IRE) 0Lux/F1.9(IR on)				
S/N Ratio	More than 50dB				
IR Distance	Distance up to 60m(197ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	4				
Lens					
Lens Type	Motorized				
Mount Type	Board-in				
Focal Length	3.7mm~11mm				
Max. Aperture	F1.9				
Angle of View	H:112°~46°, V:60°~26°				
Focus Control	Motorized				
Close Focus Distance	0.2m(0.66ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	83m(272ft)	33m(108ft)	17m(56ft)	8m(26ft)
	T	190m(623ft)	76m(249ft)	38m(125ft)	19m(62ft)
PTZ					
Pan/Tilt Range	Pan:0° ~355°, Tilt:0° ~75°, Rotation:0° ~355°				
Intelligence					
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal access, Storage anomaly				
IVS	Tripwire, Intrusion				
Video					
Compression	H.265/H.264H/MJPEG(Sub Stream)				
Smart Codec	Support H.265+/H.264+				
Streaming Capability	2 Streams				
Resolution	4K(3840×2160)/6M(3072×2048)/5M(2560×1920)/ 3M(2048×1536)/3M(2304×1296)/ 1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480) /VGA(640×480)/CIF(352×288/352×240)				
Frame Rate	Main Stream: 4K (1~25/30fps) Sub Stream: D1(1~25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.264: 32Kbps~8192Kbps H.265: 16Kbps~8192Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization(EIS)	N/A				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	G.711a/ G.711Mu/ AAC/ G.726				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP/HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP; FTP;DHCP;DNS;DDNS;PPPoE;IPV4/V6;QoS;UPnP; NTP;Bonjour;IEEE 802.1X;Multicast;ICMP;IGMP;TLS;NFS;SSH				
Interoperability	ONVIF, PSIA, CGI				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording Micro SD Card 128GB				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	IOS, Android				
Interface					
Video Interface	N/A				
Audio Interface	1/1 channel In/Out				
RS485	N/A				
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC				
Electrical					
Power Supply	DC12V PoE (802.3af)(Class 0)				
Power Consumption	<14.3W				
Environmental					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	IK10(optional)				
Construction					
Casing	Metal				
Dimensions	244.1mm×79mm×75.9mm (9.61"×3.11"×2.99")				
Net Weight	0.824Kg (1.82lb)				
Gross Weight	1.09Kg(2.4lb)				

PIXVIDEO

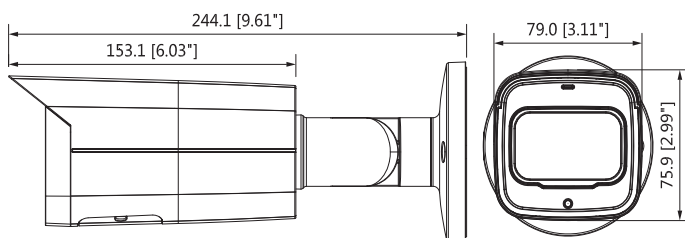

ACCESSORI (OPTIONAL)




ACM260



ACM212



ACM262



ACM202