




IP Camera Dome PANORAMICA con 4 OTTICHE ANTIVANDALO IK10, IP67

Camera IP Dome PANORAMICA con 4 OTTICHE H265+/H264 da esterno/interno IP67 antivandalo IK10, 4 sensori CMOS progressivo 1/1.9" da 2Mp, risoluzione 8Mp con 25Fps, ICR meccanico, ottiche fisse 5.0mm auto IRIS DC, luminosità 0.005Lux f2.2 (0 con Led ON), led SMART IR portata fino a 30mt, 1 LAN 100/1.000Mbps, 2 ingressi e 2 uscite di allarme, 1 ingresso e 1 uscita audio, 1 slot per MicroSD-Card (max 128Gb), analisi video, privacy mask 4 aree, 3D, WDR, alimentazione 24 Vac o PoE+ <25.5W, in dotazione staffa da muro, compatibile ONVIF

PIXVIDEO

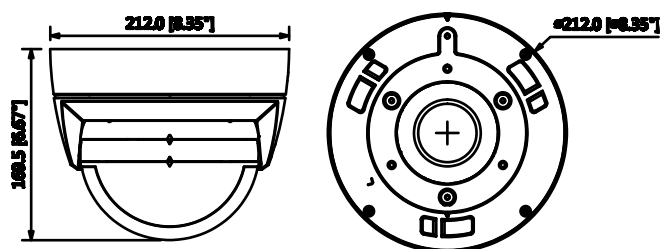

ACCESSORI (OPTIONAL)




ACM204



ACM209



ACM211



ACM202



ACM203

CARATTERISTICHE TECNICHE

Camera	NDM202P			
Image Sensor	Four 1/1.9" 2Megapixel progressive scan CMOS			
Effective Pixels	4096(H)x1800(V)			
RAM/ROM	1024MB/128MB			
Scanning System	Progressive			
Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s			
Minimum Illumination	0.005Lux/F2.2(Color,1/3s,30IRE) 0.03Lux/F2.2(Color,1/30s,30IRE) 0Lux/F2.2(IR on)			
S/N Ratio	More than 50dB			
IR Distance	Distance up to 30m(98ft)			
IR On/Off Control	Auto/ Manual			
IR LEDs	6			
Lens				
Lens Type	Fixed			
Mount Type	Board-in			
Focal Length	5.0mm			
Max. Aperture	F2.2			
Angle of View	H: 180°, V: 80°			
Optical Zoom	N/A			
Focus Control	Fixed			
Close Focus Distance	N/A			
DORI Distance	Detect	Observe	Recognize	Identify
	53m(178ft)	21m(69ft)	10m(33ft)	5m(17ft)
Pan/Tilt/Rotation				
Pan/Tilt/Rotation Range	Pan:0°~355°, Tilt:0°~75°, Rotation:±20°			
Intelligence				
Event Trigger	Motion detection, Video tampering , Scene changing, Network disconnection , IP address conflict, Illegal Access,Storage anomaly			
IVS	Tripwire, Intrusion, Object Abandoned/Missing			
Advanced Intelligent Functions	Heat Map, E-PTZ			
Video				
Compression	H.265/H.264/H.264B/H.264H/MJPEG(Sub Stream)			
Smart Codec	Support H.265+/H.264+			
Streaming Capability	3 Streams			
Resolution	4096×1800/3840×1680/2880×1264/ /1920×832/1280×560/1024X452			
Frame Rate	Main Stream: 4096x1800 (1~25fps) Sub Stream: 1024X452 (1 ~ 25fps) Third Stream: 1920x832 (1 ~ 25fps)			
Bit Rate Control	CBR/VBR			
Bit Rate	H.265: 9Kbps~ 9472Kbps H.264: 24Kbps~ 15616Kbps			
Day/Night	Auto(ICR) / Color / B/W			
BLC Mode	BLC / HLC / WDR(120dB)			
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual			
Gain Control	Auto/Manual			
Noise Reduction	3D DNR			
Motion Detection	Off / On (4 Zone, Rectangle)			
Region of Interest	Off / On (4 Zone)			
Electronic Image Stabilization(EIS)	N/A			
Smart IR	Support			
Defog	N/A			
Digital Zoom	16x			
Flip	N/A			
Mirror	N/A			
Privacy Masking	Off / On (4 Area, Rectangle)			
Audio				
Compression	G.711a/G.711Mu/AAC/ G.726			
Network				
Ethernet	RJ-45 (100/1000Base-T)			
Protocol	HTTP:HTTPs;TCP:ARP;RTSP;RTP;UDP;RTCP;SMTP; FTP;DHCP;DNS;DDNS;PPPOE;IPV4/v6;QoS;UPnP; NTP;Bonjour;IEEE 802.1x;Multicast;CMP;IGMP;SNMP;TLS			
Interoperability	ONVIF Profile S&G, API			
Streaming Method	Unicast / Multicast			
Max. User Access	10 Users/20 Users			
Edge Storage	NAS Local PC for instant recording Micro SD card 128GB			
Web Viewer	IE, Chrome, Firefox, Safari			
Management Software	Smart PSS, DSS, DMSS			
Smart Phone	IOS, Android			
Interface				
Video Interface	1 Port(For adjustment only)			
Audio Interface	1/1 channel In/Out			
RS485	N/A			
Alarm	2 channel In: 5mA 5VDC 2 channel Out: 1A 30VDC / 0.5A 50VAC			
Electrical				
Power Supply	AC24V, PoE+(802.3at)(Class 4)			
Power Consumption	<25.5W			
Environmental				
Operating Conditions	-40° C ~ +60° C (-40° F ~ +140° F) / Less than 95% RH			
Storage Conditions	-40° C ~ +60° C (-40° F ~ +140° F) / Less than 95% RH			
Ingress Protection	IP67			
Vandal Resistance	IK10			
Construction				
Casing	Metal			
Dimensions	Φ212mm×169.5mm(Φ8.35"×6.67")			
Net Weight	3.6kg(7.9lb)			
Gross Weight	4.6kg(10.1lb)			