




Telecamera HDCVI STARLIGHT da 5Mp Ottica 3.6mm, IR 80mt

Telecamera Bullet HDCVI STARLIGHT da 5Mp a 20Fps o 4Mp a 25fps, da esterno/interno IP67, sensore CMOS progressivo 1/2.8", ottica 3.6mm, luminosità 0.005Lux/F1.6, (0Lux IR on), led SMART IR portata fino a 80mt, 2-3D, WDR, OSD menù su cavo coassiale, 1 uscita video HDCVI o CVBS, OSD su cavo coassiale, alimentazione 12V <10W, in dotazione staffa di fissaggio

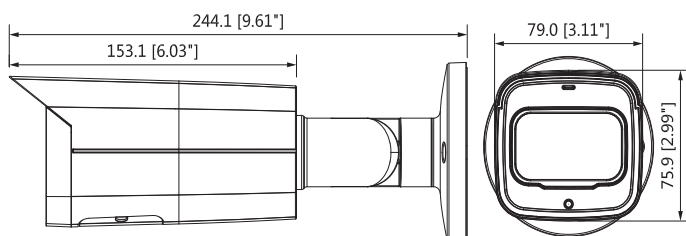

ACCESSORI (OPTIONAL)



ACM260




ACM212



ACM203



ACM262



ACM202

CARATTERISTICHE TECNICHE

Camera	HBF504S	
Image Sensor	1/2.8" CMOS	
Effective Pixels	2592(H)×1944(V), 5MP	
Scanning System	Progressive	
Electronic Shutter Speed	PAL: 1/4s~1/100,000s NTSC: 1/3s~1/100,000s	
Minimum Illumination	0.005Lux/F1.6, 30IRE, 0Lux IR on	
S/N Ratio	More than 65dB	
IR Distance	Up to 80m (262feet)	
IR On/Off Control	Auto / Manual	
IR LEDs	4	
Lens		
Lens Type	Fixed lens / Fixed iris	
Mount Type	Board-in	
Focal Length	3.6mm	
Max Aperture	F1.6	
Angle of View	H: 79° (49.5°/38°)	
Focus Control	N/A	
Close Focus Distance	1300mm (3000mm, 4400mm) 51.2" (118", 173")	
Pan / Tilt / Rotation		
Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°	
Video		
Resolution	5MP (2592×1944)	
Frame Rate	20fps@5MP, 25/30fps@4MP, 25/30fps@1080P	
Video Output	1-channel BNC high definition video output / CVBS video output (DIP switch)	
Day/Night	Auto (ICR) / Manual	
OSD Menu	Multi-language	
BLC Mode	BLC / HLC / WDR	
WDR	120dB	
Gain Control	AGC	
Noise Reduction	2D/3D	
White Balance	Auto / Manual	
Smart IR	Auto / Manual	
DORI Distance		
Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.		
	DORI Definition	Distance
Detect	25px/m (8px/ft)	3.6mm:72m(236ft)
		6mm:120m(394ft)
		8mm:160m(525ft)
Observe	63px/m (19px/ft)	3.6mm:29m(95ft)
		6mm:48m(157ft)
		8mm:64m(210ft)
Recognize	125px/m (38px/ft)	3.6mm: 14m(46ft)
		6mm: 24m(79ft)
		8mm:32m(105ft)
Identify	250px/m (76px/ft)	3.6mm:7m(23ft)
		6mm:12m(39ft)
		8mm:16m(52ft)
Interface		
Audio Interface	1ch in & Built-in Mic	
Electrical		
Power Supply	12V DC ±30%	
Power Consumption	Max. 10W (12V DC, IR on)	
Environmental		
Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH * Start up should be done at above -40°C (-40°F)	
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH	
Ingress Protection & Vandal Resistance	IP67	
Construction		
Casing	Aluminium	
Dimensions	244.1mm×90.4mm×90.4mm (9.61"×3.5"×23.5")	
Net Weight	0.75kg (1.65lb)	
Gross Weight	0.92kg (2.02lb)	