




### Telecamera HDCVI 1,4Mp 2.7~12 mm motorizzata

Telecamera Bullet HDCVI da esterno/interno IP66 con sensore CMOS 1/3", risoluzione 1,4 Mp con 25F/50Fps, ICR meccanico, ottica 2.7~12 mm motorizzata, luminosità 0.01Lux (0 con LED ON), led Smart IR portata fino a 30mt, 2D/3D, uscita video HD-CVI o PAL, OSD su cavo coassiale, alimentazione 12Vdc, max 7.5W, in dotazione staffa di fissaggio

## PIXVIDEO

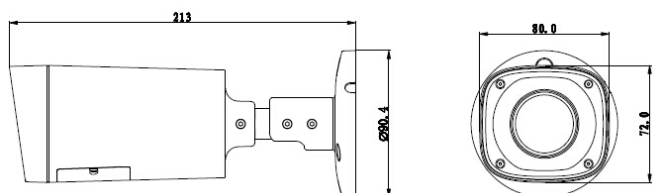

### CARATTERISTICHE TECNICHE

Camera HHCVI 720P MOTORIZZATA mod. HBV102	
Image Sensor	1/3" 1.4Megapixel CMOS
Effective Pixels	1305(H)×1049(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/50fps@720P
Synchronization	Internal
Mini. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)
Camera Features	
Max. IR LEDs Length	30m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	2.7~12mm motorized
Lens Type	Motorized / Fixed Iris
Mount Type	F14
General	
Power Supply	DC12V±10%
Power Consumption	Max 7.5W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions(W×D×H)	213mm×80mm×72mm
Weight	0.55kg