




Telecamera HDCVI da 2 Megapixel integrata su rivelatore infrarosso da interno

Telecamera HDCVI integrata su rivelatore infrarosso da interno con portata 12mt, sensore progressivo 1/2.9" CMOS da 2Mp, risoluzione 1.080p con 25Fps, day & night elettronico, ottica fissa da 2.8mm f2.0, luminosità 0.02Lux / 0.002Lux f2.0, 2D, 1 uscita video (HDCVI o AHD o TVI o CVBS), comunicazione allarme tramite coassiale su videoregistratore, alimentazione 12Vdc <0.7W compatibile ONVIF, con HD da 2TB installato

PIXVIDEO

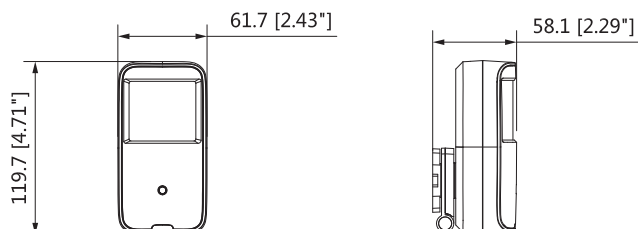

CARATTERISTICHE TECNICHE

Camera		HCF200PIR
Image Sensor		1/2.9" CMOS
Effective Pixels		1920(H)×1080(V), 2MP
Scanning System		Progressive
Electronic Shutter Speed		PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination		0.02Lux/F2.0(Color), 0.002Lux/F2.0(B/W)
S/N Ratio		More than 65dB
Lens		
Lens Type		Fixed lens / Fixed iris
Mount Type		Board-in
Focal Length		2.8mm
Max Aperture		F2.0
Angle of View		H: 100.5°
Focus Control		N/A
Close Focus Distance		500mm
		19.7"
DORI Distance		
Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.		
	DORI Definition	Distance
Detect	25px/m (8px/ft)	44m(143ft)
Observe	63px/m (19px/ft)	17m(57ft)
Recognize	125px/m (38px/ft)	9m(29ft)
Identify	250ppm (76px/ft)	4m(14ft)
Pan / Tilt / Rotation		
Pan/Tilt/Rotation		Pan: 0° ~ 180° Tilt: 0° ~ 180° Rotation: 0° ~ 360°
Video		
Resolution		1080P (1920×1080)
Frame Rate		25/30fps@1080P, 25/30/50/60fps@720P
Video Output		1-channel BNC high definition video output / CVBS video
Day/Night		Auto (Electronic) / Manual
OSD Menu		Multi-language
BLC Mode		BLC / HLC / DWDR
WDR		DWDR
Gain Control		AGC
Noise Reduction		2D
White Balance		Auto / Manual
PIR		
Detection		Passive infrared
Detection Range		12mx12m, 100°, 19zones
Alarm prompt		Red led, can be set to switch off
Sensitivity		Two level (jumper)
Pet immunity		≤18Kg
Resistance light		6500LUX
Installation height		Default bracket, wall mount, 2.2-2.5m
Certifications		
Certifications		CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Interface		
Audio Interface		N/A
Electrical		
Power Supply		12V DC ±25%
Power Consumption		Max 0.7W (12V DC, IR on)
Environmental		
Operating Conditions		-10°C ~ +50°C (14°F ~ +122°F) / Less than 90% RH * Start up should be done at above -10°C (14°F)
Storage Conditions		-10°C ~ +50°C (14°F ~ +122°F) / Less than 90% RH
Ingress Protection & Vandal Resistance		N/A
Construction		
Casing		Plastic
Dimensions		120mm×62mm×58mm (4.72"×2.44"×2.28")
Net Weight		0.13kg (0.29lb)
Gross Weight		0.18kg (0.40lb)