




Telecamera HDCVI da 4Mp motorizzata

Telecamera Dome HDCVI da esterno/interno IP67, sensore CMOS progressivo 1/3", risoluzione 4Mp con 25Fps, ICR meccanico, ottica motorizzata 2.7~12mm, luminosità 0.01Lux f1.3 (0 con LED ON), led IR portata fino a 60mt, 2-3D, WDR (120db), 2 uscite video (1 HDCVI + 1 CVBS), OSD su coassiale, alimentazione 12Vdc <8.4W

PIXVIDEO

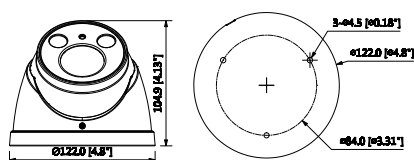

ACCESSORI (OPTIONAL)



ACM207



ACM253



ACM203



ACM262

CARATTERISTICHE TECNICHE

Camera	HDV400M
Image Sensor	1/3" CMOS
Effective Pixels	2688(H)×1520(V), 4.1MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/4s~1/100,000s, NTSC: 1/3s~1/100,000s
Minimum Illumination	0.01Lux/F1.3, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 60m (197feet)
IR On/Off Control	Auto / Manual
IR LEDs	2
Lens	
Lens Type	Motorized lens / Fixed iris
Mount Type	Board-in
Focal Length	2.7-12mm
Max Aperture	F1.3
Angle of View	H: 98°~26°
Focus Control	Auto / Manual
Close Focus Distance	200mm - 7.87"
Video	
Resolution	4MP (2560×1440)
Frame Rate	25fps@4MP, 25/30fps@1080P, 25/30fps@720P
Video Output	1-channel BNC HDCVI high definition video output & 1-channel BNC CVBS video output
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / WDR
WDR	120dB
Gain Control	AGC
Noise Reduction	2D/3D
White Balance	Auto / Manual
Smart IR	Auto / Manual
Electrical	
Power Supply	12V DC ±25%
Power Consumption	Max 8.4W (12V DC, IR on)
Environmental	
Operating Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH -. * Start up should be done at above 30°C (-22°F)
Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection & Vandal Resistance	IP67
Construction	
Casing	Aluminium
Dimensions	Φ122mm×104.9mm (Φ4.8"×4.13")
Net Weight	0.59kg (1.30lb)
Gross Weight	0.74kg (1.63lb)