




## Camera IP Bullet da 2 Megapixel, IP67 STARLIGHT MOTORIZZATA - IR 60mt

Camera IP Bullet IP67 STARLIGHT, risoluzione 2Mp con 25Fps, con sensore CMOS progressivo 1/2,7", H265+/H264, ICR meccanico, ottica motorizzata 2.7~13,5mm, luminosità 0.006Lux /F1.4 (0 Lux con IR on), led IR portata fino a 60mt, 1 slot per MicroSD-Card (max 128Gb), porta LAN 10/100, privacy mask 4 aree, 3D, D-WDR, alimentazione 12Vdc o PoE IEEE802.3af massimo 11,7W, in dotazione staffa di fissaggio, compatibile ONVIF

## PIXVIDEO

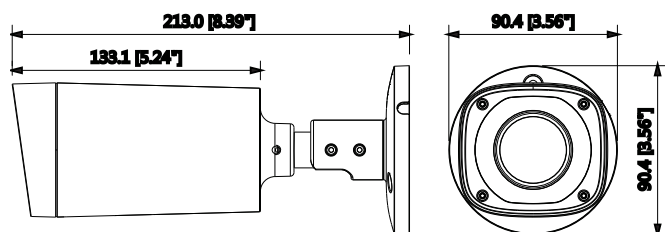

### ACCESSORI (OPTIONAL)




ACM260



ACM212



ACM262



ACM202

## CARATTERISTICHE TECNICHE

<b>Camera</b>	<b>NBV201SM</b>				
Image Sensor	1/2.8" 2Megapixel progressive CMOS				
Effective Pixels	1920(H) x1080(V)				
RAM/ROM	256MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s				
Minimum Illumination	0.006Lux/F1.4( Color,1/3s,30IRE) 0.05Lux/F1.4( Color,1/30s,30IRE) 0Lux/F1.4(IR on)				
S/N Ratio	More than50dB				
IR Distance	Distance up to 60m(197ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	4				
<b>Lens</b>	<b>Electronic</b>				
Lens Type	Board-in				
Mount Type	Board-in				
Focal Length	2.7mm~13.5mm				
Max. Aperture	F1.4				
Angle of View	H:106°~29°, V:57°~17°				
Focus Control	Fixed				
Close Focus Distance	0.2m				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	46m(150ft)	18m(59ft)	9m(30ft)	5m(16ft)
	T	153m(502ft)	61m(200ft)	31m(102ft)	15m(49ft)
<b>PTZ</b>	<b>Electronic</b>				
Pan/Tilt Range	Pan:0° ~360°, Tilt:0° ~90°, Rotation:0° ~360°				
<b>Intelligence</b>	<b>Electronic</b>				
IVS	Tripwire, Intrusion				
<b>Video</b>	<b>Electronic</b>				
Compression	H.265+/H.265/H.264+/H.264				
Streaming Capability	2 Streams				
Resolution	1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x960)/720P(1280x720)/D1(704x576)/704x480)/VGA(640x480)/CIF(352x288/352x240)				
Frame Rate	1080P (1 ~ 25/30fps) D1/CIF(1 ~ 25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 6400Kbps H.264: 32K ~ 10240Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detetion	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
<b>Network</b>	<b>Electronic</b>				
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP;DNS;DDNS;PPPOE;IPv4/v6;SNMP;QoS;UPnP;NTP				
Interoperability	ONVIF, PSIA, CGI				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording Micro SD Card 128GB				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, Easy4ip				
Smart Phone	IOS, Android				
<b>Certifications</b>	<b>Electronic</b>				
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B				
<b>Electrical</b>	<b>Electronic</b>				
Power Supply	DC12V PoE (802.3af)(Class 0)				
Power Consumption	<11.4W(-ZS), <9.09W(-VFS)				
<b>Environmental</b>	<b>Electronic</b>				
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
<b>Construction</b>	<b>Electronic</b>				
Casing	Metal				
Dimensions	72mmx80mmx212.8mm (2.8" x 3.1" x 8.4")				
Net Weight	0.685Kg (1.51lb)				
Gross Weight	0.86Kg (1.90lb)				