




**Camera IP Bullet IP67, risoluzione 3Mp con 20Fps** (25Fps a 2Mp), con sensore CMOS progressivo 1/3" Aptina, ICR meccanico, ottica motorizzata 2.7~12mm IRIS fisso, luminosità 0.1Lux (0 Lux con IR on), led IR portata fino a 60mt, 1 slot per SD-Card (max 128Gb), 1 porta LAN 10/100, privacy mask 4 aree, 3D, D-WDR, alimentazione 12Vdc o PoE IEEE802.3af massimo 13W, in dotazione staffa di fissaggio, compatibile ONVIF

## PIXVIDEO

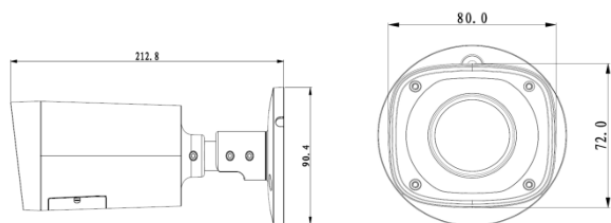

### CARATTERISTICHE TECNICHE

| Camera                              | Mod: NBV303M   |
|-------------------------------------|--|
| Image Sensor                        | 1/3" 3Megapixel progressive CMOS   |
| Effective Pixels                    | 2304(H) x1536(V)   |
| RAM/ROM                             | 256MB/16MB   |
| Scanning System                     | Progressive  |
| Minimum Illumination                | 0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)   |
| S/N Ratio                           | More than 50dB   |
| IR Distance                         | Distance up to 60m(197ft)  |
| IR On/Off Control                   | Auto/ Manual   |
| IR LEDs                             | 4  |
| Lens                                |  |
| Lens Type                           | Motorized  |
| Mount Type                          | Board-in   |
| Focal Length                        | 2.7mm~12mm   |
| Max. Aperture                       | F1.4   |
| Angle of View                       | H:87°~29°, V:42°~15°   |
| Focus Control                       | Motorized  |
| Close Focus Distance                | 0.3m   |
| Video                               |  |
| Compression                         | H.264+/H.264   |
| Streaming Capability                | 2 Streams  |
| Resolution                          | 3M(2304x1296)/(2048x1536)/<br>1080P(1920x1080)/1.3M(1280x960)/<br>720P(1280x720)/D1(704x576/704x480)/ CIF(352x288/352x240) |
| Frame Rate                          | 3M(1~20fps)<br>D1/CIF(1 ~ 25/30fps)  |
| Bit Rate Control                    | CBR/VBR  |
| Bit Rate                            | H264:24K ~ 8192Kbps  |
| Day/Night                           | Auto(ICR) / Color / B/W  |
| BLC Mode                            | BLC / HLC / DWDR   |
| White Balance                       | Auto/Natural/Street Lamp/Outdoor/Manual  |
| Gain Control                        | Auto/Manual  |
| Noise Reduction                     | 3D DNR   |
| Motion Detetion                     | Off / On (4 Zone, Rectangle)   |
| Region of Interest                  | Off / On (4 Zone)  |
| Electronic Image Stabilization(EIS) | N/A  |
| Smart IR                            | Support  |
| Digital Zoom                        | 16x  |
| Flip                                | 0°/90°/180°/270°   |
| Mirror                              | Off / On   |
| Privacy Masking                     | Off / On (4 Area, Rectangle)   |
| Network                             |  |
| Ethernet                            | RJ-45 (10/100Base-T)   |
| Protocol                            | HTTP;HTTps;TCP;ARP;RTSP;RTP;UDP;SMTP;FTP;<br>DHCP;DNS;DDNS;PPPOE;IPv4/v6;QoS;UPnP;NTP;<br>Bonjour;802.1x;Multicast;IGMP;   |
| Interoperability                    | ONVIF, PSIA, CGI   |
| Streaming Method                    | Unicast / Multicast  |
| Max. User Access                    | 10 Users/20 Users  |
| Edge Storage                        | NAS(Network Attached Storage)<br>Local PC for instant recording<br>Micro SD Card 128GB                                     |
| Web Viewer                          | IE, Chrome, Firefox, Safari  |
| Management Software                 | Smart PSS, DSS, Easy4ip  |
| Smart Phone                         | iOS, Android   |
| Certifications                      |  |
| Certifications                      | CE (EN 60950:2000)<br>UL:UL60950-1<br>FCC: FCC Part 15 Subpart B   |
| Electrical                          |  |
| Power Supply                        | DC12V PoE (802.3af)(Class 0)   |
| Power Consumption                   | < 12.95W   |
| Environmental                       |  |
| Operating Conditions                | -30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH  |
| Storage Conditions                  | -30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH  |
| Ingress Protection                  | IP67   |
| Construction                        |  |
| Casing                              | Metal  |
| Dimensions                          | 90,4mm×90,4mm×212,8mm  |
| Net Weight                          | 0.685Kg (1.51lb)   |
| Gross Weight                        | 0.86Kg (1.90lb)  |