




Camera IP Dome WIFI, antivandalo IK10, da esterno/interno IP66 con sensore CMOS progressivo 1/3" Aptina, risoluzione massima 2Mp con 25Fps, ICR meccanico, ottica da 3.6mm passo M12 con regolazione su 2 assi, luminosità 0,1 lux f 1.8 (0 con Led ON), led IR portata fino a 30mt, porta LAN 10/100 + Wifi 802.11b/g, privacy mask 4 aree, 2D, D-WDR, alimentazione 12Vdc massimo 4W, dotazione software, compatibile ONVIF

PIXVIDEO

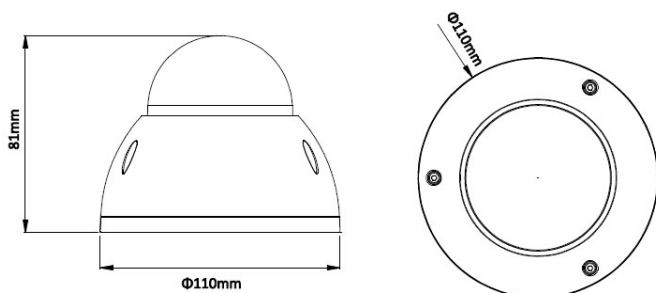

CARATTERISTICHE TECNICHE

Camera: NDF200W	
Image Sensor	1/3" 3Megapixel CMOS
Effective Pixels	2048 (H)x1536(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s
Min. Illumination	0.1Lux/F1.8(Color),0Lux/F1.8 (IR on)
S/N Ratio	More than 50dB
Video Output	N/A
Camera Features	
Max. IR LEDs Length	30m
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	2D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	3.6mm (2.8mm, 6mm optional)
Max Aperture	F1.8(F2.0,F1.6)
Focus Control	Manual
Angle of View	H:71.9°(90°/45°)
Lens Type	Fixed lens
Mount Type	Board-in Type
Video	
Compression	H.264/ MJPEG
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
Frame Rate	Main Stream 1080P/720P(1 ~ 25/30fps) Sub Stream D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 16K ~ 8192Kbps
Audio	
Compression	N/A
Interface	N/A
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	Wi-Fi(802.11b/g/n)
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF,CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V
Power Consumption	< 4.5W
Working Environment	-30°C~+50°C, Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ110mm×81mm
Weight	0.39kg