




## Dome Camera IP da 4Mp, ottica 2,8mm, ANTIVANDALO IK10 - IP67

Camera IP Dome IP67 risoluzione 4Mp con 20Fps, antivandalo IK10 con sensore CMOS progressivo 1/3", H.265+/H.264, ICR meccanico, ottica 2.8mm con regolazione su 3 assi, luminosità 0.08Lux f2.0 (0 Lux con IR on), led IR portata fino a 30mt, porta LAN 10/100, slot per micro SD, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc o PoE <5.5W, compatibile ONVIF

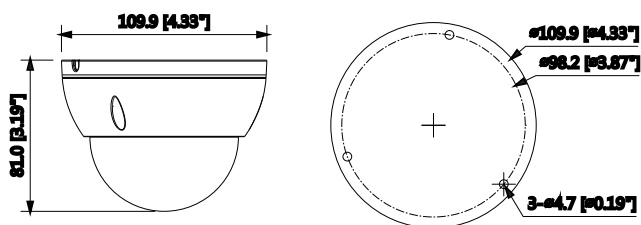

### ACCESSORI (OPTIONAL)



ACM206




ACM257



ACM253



ACM262



ACM202

## CARATTERISTICHE TECNICHE

<b>Camera</b>	<b>NDF402A</b>				
Image Sensor	1/3" 4Megapixel progressive CMOS				
Effective Pixels	2688(H)x1520(V)				
RAM/ROM	512MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s				
Minimum Illumination	0.08Lux/F2.0( Color,1/3s,30IRE) 0.3Lux/F2.0( Color,1/30s,30IRE) 0Lux/F2.0(IR on)				
S/N Ratio	More than 50dB				
IR Distance	Distance up to 30m(98ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	24				
<b>Lens</b>					
Lens Type	Fixed				
Mount Type	Board-in				
Focal Length	2.8mm				
Max. Aperture	F2.0/F2.0				
Angle of View	H:104°/87°, V:57°/48°				
Focus Control	Fixed				
Close Focus Distance	N/A				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	63(207ft)	25(82ft)	13(43ft)	6(20ft)
	3.6 mm	80(262ft)	32(105ft)	16(52ft)	8(26ft)
<b>PTZ</b>					
Pan/Tilt Range	Pan:0° ~355° ;Tilt:0° ~65° ;Rotation:0° ~355°				
<b>Intelligence</b>					
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, Ip address conflict, Illegal access, Storage anomaly				
IVS	Tripwire, Intrusion				
<b>Video</b>					
Compression	H.265/H.264H/MJPEG(Sub Stream)				
Smart Codec	Support H.265+/H.264+				
Streaming Capability	2 Streams				
Resolution	4M(2688x1520)/3M(2304x1296)/1080P(1920x1080)/720P(1280x720)/VGA(640x480)/D1(704x576)/704x480/CIF(352x288/352x240)				
Frame Rate	Main Stream: 4M(1 ~ 20fps)/3M(1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 8448Kbps H.264: 32K ~ 10240Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization (EIS)	N/A				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
<b>Audio</b>					
Compression	N/A				
<b>Network</b>					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;HTTPS;TCP;ARP;RTP;RTSP;RTCP;UDP;SMTP; FTP;DHCP;DNS;DDNS;PPPoE;IPV4/V6;QoS;UPnP; NTP;Bonjour;IEEE 802.1X;Multicast;IGMP;TLS				
Interoperability	ONVIF Profile S&G, API				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	IOS, Android				
<b>Interface</b>					
Video Interface	N/A				
Audio Interface	N/A				
RS485	N/A				
Alarm	N/A				
<b>Electrical</b>					
Power Supply	DC12V, PoE(IEEE 802.3af)(Class 0)				
Power Consumption	< 5.5W				
<b>Environmental</b>					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	IK10				
<b>Construction</b>					
Casing	Metal				
Dimensions	Φ109.9mm × 81mm (4.33" × 3.19")				
Net Weight	0.34Kg (0.75lb)				
Gross Weight	0.47Kg (1.04lb)				