




Camera IP da 5 MEGA PIXEL FISHEYE Dome camera IP, antivandalo IK08, da esterno/interno IP67, con analisi video, con sensore CMOS progressivo 1/2.7", risoluzione massima 5Mp con 25Fps, H.265+/H.264, ottica fisheye da 1.4mm, luminosità 0.02Lux f1.6, porta LAN 10/100, privacy mask 4 aree, 3D, WDR, dewarping, microfono integrato e un uscita audio, 1 slot per MicroSD-Card per backup (max 128Gb), alimentazione 12Vdc/PoE <3.4W, compatibile ONVIF




ACCESSORI (OPTIONAL)

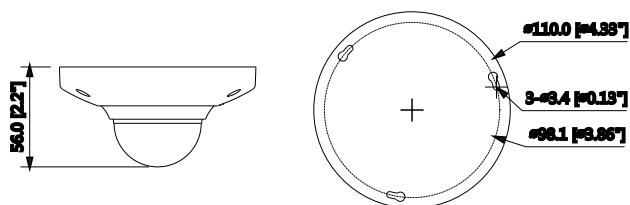

ACM253



ACM262



ACM202

CARATTERISTICHE TECNICHE

Camera	NDF500F				
Image Sensor	1/2.7" 5Megapixel progressive scan CMOS				
Effective Pixels	2592(H)x1944(V)				
RAM/ROM	512MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s				
Minimum Illumination	0.02Lux/F1.6(Color,1/3s,30IRE) 0.2Lux/1.6(Color,1/30s,30IRE) 0.05Lux/1.6(B/W,1/3s,30IRE) 0.5Lux/1.6(B/W,1/30s,30IRE)				
S/N Ratio	More than 50dB				
IR Distance	N/A				
IR On/Off Control	N/A				
IR LEDs	N/A				
Lens					
Lens Type	Fixed				
Mount Type	Board-in				
Focal Length	1.4mm				
Max. Aperture	F1.6				
Angle of View	H: 180°, V: 180°				
Optical Zoom	N/A				
Focus Control	Fixed				
Close Focus Distance	N/A				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	1.4mm	28m(92ft)	11m(36ft)	6m(20ft)	3m(10ft)
Pan/Tilt/Rotation					
Pan/Tilt/Rotation Range	Pan:0°~355°; Tilt:0°~75°; Rotation:0°~360°				
Intelligence					
Advanced Intelligent Functions	Tripwire, Intrusion, Heat map				
Video					
Compression	H.265+/H.265/H.264+/H.264				
Streaming Capability	3 Streams				
Resolution	5M(2592x1944)/3M(2048x1536)/UXGA(1600x1200)/1.3M(1280x960)/D1(704x576/704x480)/CIF(352x288/352x240)				
Frame Rate	Main Stream:5M(1~25fps) Sub Stream: D1(1~25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.264: 24~10240kbps H.265: 14~9984kbps				
Day/Night	Electronic				
BLC Mode	BLC / HLC / WDR				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detetion	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization (EIS)	N/A				
Smart IR	N/A				
Defog	N/A				
Digital Zoom	16x				
Flip	N/A				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	G.711a/ G.711Mu/ AAC/ G.726				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP; HTTPS; TCP; ARP; RTP; RTSP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP				
Interoperability	ONVIF, PSIA, CGI				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users /20 Users				
Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, Easy4ip				
Smart Phone	IOS, Android				
Certifications					
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B				
Interface					
Video Interface	N/A				
Audio Interface	Built-in Mic				
RS485	N/A				
Alarm	N/A				
Electrical					
Power Supply	DC12V, PoE (802.3af)(Class 0)				
Power Consumption	<3.4W				
Environmental					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	IK08				
Construction					
Casing	Metal				
Dimensions	Φ110mmx56mm (4.33"x2.2")				
Net Weight	0.38Kg (0.84lb)				
Gross Weight	0.44Kg (0.97lb)				