




CARATTERISTICHE TECNICHE

Camera IP da 6 MEGA PIXEL FISHEYE con IR Dome camera IP, antivandalo IK10, da esterno/interno IP67, con analisi video, con sensore CMOS progressivo Sony Starvis 1/1.8", risoluzione massima 6Mp con 25Fps, H.265/H.264, ottica fisheye da 1.3mm, luminosità 0.005Lux f2.8 (0 lux con IR on), led IR portata fino a 10mt, porta LAN 10/100/1000bps, 2 ingressi e 2 uscite di allarme, microfono integrato, 1 ingresso e 1 uscita audio, 1 slot per MicroSD-Card per backup (max 128Gb), privacy mask 4 aree, 3D, WDR, dewarping, alimentazione 12Vdc/PoE <12W, compatibile ONVIF

PIXVIDEO

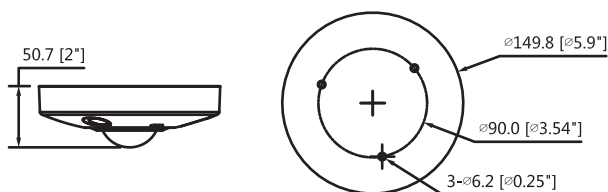

ACCESSORI (OPTIONAL)



ACM225



ACM205



ACM202



ACM203



ACM262

Camera	NDF601FK			
Image Sensor	1/1.8" 6Megapixel progressive scan CMOS			
Effective Pixels	3072(H)x2048(V)			
RAM/ROM	1024MB/128MB			
Scanning System	Progressive			
Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s			
Minimum Illumination	0.005Lux/F2.8(Color,1/3s,30IRE) 0.05Lux/F2.8(Color,1/30s,30IRE) 0Lux/F2.8(IR on)			
S/N Ratio	More than 50dB			
IR Distance	Distance up to 10m(33ft)			
IR On/Off Control	Auto/ Manual			
IR LEDs	3			
Lens				
Lens Type	Fixed			
Mount Type	Board-in			
Focal Length	1.3mm			
Max. Aperture	F2.8			
Angle of View	H: 180°, V:180°			
Optical Zoom	N/A			
Focus Control	Fixed			
Close Focus Distance	N/A			
DORI Distance	Detect	Observe	Recognize	Identify
	21m(69ft)	8m(26ft)	4m(13ft)	2m(7ft)
Pan/Tilt/Rotation				
Pan/Tilt/Rotation Range	N/A			
Intelligence				
IVS	Tripwire, Intrusion			
Advanced Intelligent Functions	Heat Map			
Video				
Compression	H.265/H.264			
Streaming Capability	3 Streams			
Resolution	6M(3072x2048)/ 4M(2048x2048)/ 3M(2048x1536)/ UXGA(1600x1200)/ 1.3M(1280x960)/ D1(704x576/704x480)/ CIF(352x288/352x240)			
Frame Rate	Main Stream: 6M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 1.3M(1~25/30fps)			
Bit Rate Control	CBR/VBR			
Bit Rate	H.265: 3Kbps~ 9984Kbps H.264: 8Kbps~ 16384Kbps			
Day/Night	Auto(ICR) / Color / B/W			
BLC Mode	BLC / HLC / DWDR			
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual			
Gain Control	Auto/Manual			
Noise Reduction	3D DNR			
Motion Detetion	Off / On (4 Zone, Rectangle)			
Region of Interest	Off / On (4 Zone)			
Electronic Image Stabilization(EIS)	N/A			
Smart IR	Support			
Defog	Support			
Digital Zoom	16x			
Flip	N/A			
Mirror	N/A			
Privacy Masking	Off / On (4 Area, Rectangle)			
Audio				
Compression	G.711a/G.711Mu/AAC/ G.726			
Network				
Ethernet	RJ-45 (100/1000Base-T)			
Protocol	HTTP;HTTPS;TCP;ARP;RTP;RTP;UDP;SMTP;FTP;DHCP;DNS;DDNS;PPPOE;IPv4/v6;QoS;UPnP;NTP;Bonjour;802.1x;Multicast;ICMP;IGMP;SNMP			
Interoperability	ONVIF, PSIA, CGI			
Streaming Method	Unicast / Multicast			
Max. User Access	10 Users/20 Users			
Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB			
Web Viewer	IE, Chrome, Firefox, Safari			
Management Software	Smart PSS, DSS, Easy4ip			
Smart Phone	IOS, Android			
Interface				
Video Interface	N/A			
Audio Interface	1/1 channel In/Out, 1 Built-in Mic			
RS485	N/A			
Alarm	2 channel In: 5mA 5VDC 2 channel Out: 1A 30VDC / 0.5A 50VAC			
Electrical				
Power Supply	DC12V, PoE (802.3af)(Class 0)			
Power Consumption	<12W			
Environmental				
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH			
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH			
Ingress Protection	IP67			
Vandal Resistance	IK10			
Construction				
Casing	Metal			
Dimensions	Ø149.8mmx50.7mm(Ø5.9"x2")			
Net Weight	0.58kg(1.28lb)			
Gross Weight	1.0kg(2.2lb)			