




Postazione Interna per Sistema Ibrido Bifilare

Monitor interno intercomunicante con altre postazioni interne compatibili, display LCD da 7" risoluzione 800x480, touch screen capacitivo e tasti per funzioni rapide, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, montaggio ad applicare su muro o scatola predisposta con piastra in dotazione, slot microSD Card, da utilizzare con postazioni esterne IP, alimentazione 24Vdc (con VAE062-2 e VAE024), consumo massimo 7W

PIXVIDEO

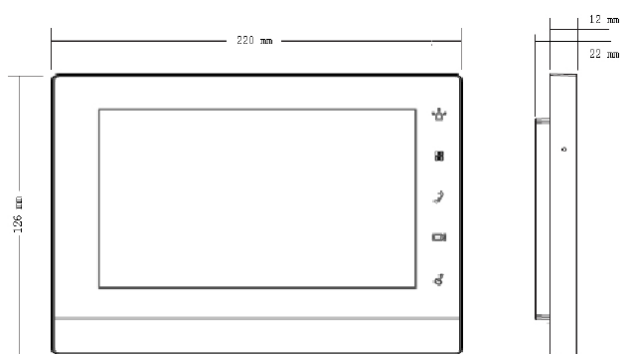

CARATTERISTICHE TECNICHE

Technical Specification

Model	VIB072-2
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	Supply by VAE062-2 + VAE024
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	- 10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.0mm×136.0mm×22.0mm
Weight	0.8Kg