




Postazione Interna

Monitor interno intercomunicante con altre postazioni interne compatibili, display LCD da 7" risoluzione 800x480, connessione tramite porta LAN, touch screen capacitivo e tasti per funzioni rapide, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, slot microSD Card, montaggio ad applicare su muro o scatola predisposta con piastra in dotazione, alimentazione 12Vdc o PoE 24Vdc (con VAE060+VAE024), consumo massimo 7W.

PIXVIDEO

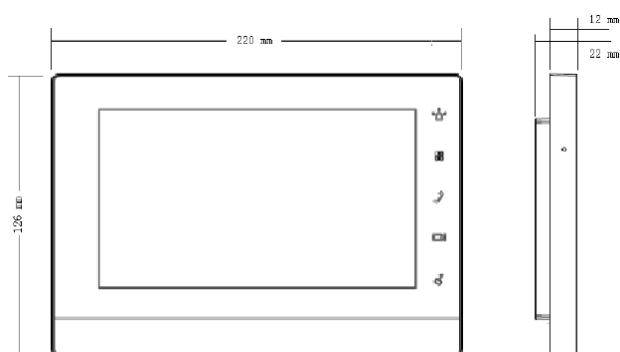

CARATTERISTICHE TECNICHE

Technical Specification

Model	VIP071A
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V/ supply directly by VAE060 + VAE024
Power Consumption	Standby $\leq 1.5W$, Work $\leq 7W$
Working Temperature	- 10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8Kg