



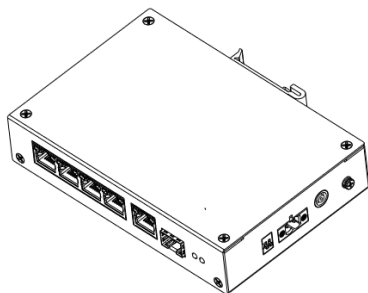





Switch di rete

Switch di rete industriale su barra DIN con 4 porte 10/100Mbps, porta 1 con PoE 30W max, 1 porta 1.000Mbps, 1 porta SFP, 4 porte PoE autosensing, alimentazione 48Vdc (totale massimo 60W). Con alimentatore in dotazione. Supporta il backup a doppia alimentazione. (150.0x100.0x30.0mm)

PIXVIDEO



CARATTERISTICHE TECNICHE

Technical Specification

Model	ACE050PD
Hardware	
Ethernet Port	4
Optical Port	1
Ethernet Port Speed	100 Mbps
Data Transmission Port	Port 1-4: 4 × RJ-45 10/100 Mbps (PoE) Port 5: 1 × RJ-45 10/100/1000 Mbps (Uplink) Port 6: 1 × SFP 100/1000 Mbps (Uplink)
Power Supply	53V DC
Operating Temperature	-30°C to +65°C (-22°F to +149°F)
Operating Humidity	5%-95% (RH)
Storage Temperature	-30°C to +70°C (-22°F to +158°F)
Storage Humidity	5%-95% (RH)
Power Consumption	Idling: 2.5W Full load: 60W
Performance	
Capacity	6.80 Gbps
Packet Forwarding Rate	3.57 Mpps
Packet Buffer Memory	1 Mbit
MAC Table Size	8K
Communication Standard	IEEE802.3; IEEE802.3u; IEEE802.3X; IEEE802.3ab; IEEE802.3z
PoE	
PoE Standard	IEEE802.3af; IEEE802.3at; Hi-PoE
PoE Power	60W
Power Consumption Management	Yes
PoE Pin Assignment	PoE/Hi-PoE: 1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Long Distance PoE	250 m long distance PoE transmission
General	
Statics Protection	Air discharge: 15kV Contact discharge: 8kV
Thunder-proof	Common mode: 4kV Differential mode: 2kV
Net Weight	0.45 kg (0.99lb)
Gross Weight	1.10 kg (2.43lb)
Product Dimensions	150 mm × 100 mm × 30 mm (5.91" × 3.94" × 1.18")
Packing Dimensions	Packing box: 270 mm × 240 mm × 75 mm (10.63" × 9.45" × 2.95") Protective box: 544 mm × 253 mm × 331 mm (21.42" × 9.96" × 13.03")