




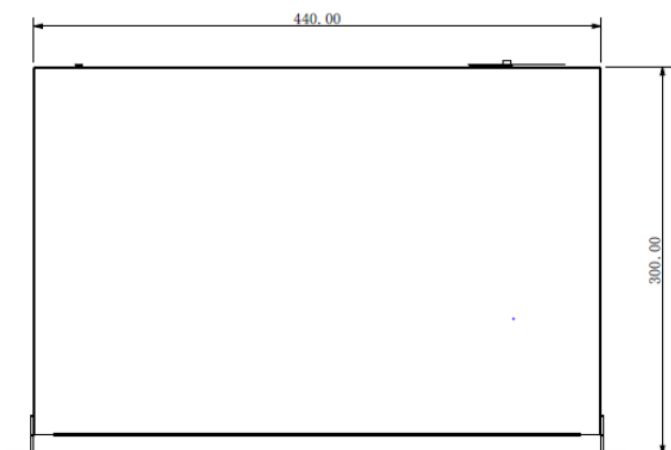

Switch di rete

Switch di rete Layer II web management da 16 porte 10/100Mbps con 16 PoE (max 240W), 1 porta 1.000Mbps, 2 porte SFP, Porta 1 e 2 10/100Mbps Hi-PoE da 60W, predisposto per montaggio rack 19", alimentazione 240Vac <260W. (440.0 x 300.0 x 44.0mm)

PIXVIDEO



CARATTERISTICHE TECNICHE

Technical Specification

Model	ACE161PM
General	
Ethernet Port	16*10/100/1000 Base-T (PoE power supply) 2*100/1000 Base-X
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8, N,1
PoE Power Consumption	Port 1 and port 2 support Hi-PoE 60W Each power ≤30W, Total≤240W
PoE Protocol	IEEE802.3af, IEEE802.3at, Hi-PoE
Switching Capacity	52Gbps
Packet Forwarding Rate	23.81Mpps
Packet Buffer Memory	4Mb
Application Humidity	5%~95%
Power	AC100-240V, 50/60Hz
Lightning Protection	Common Mode 2KV Differential Mode 1KV
Working Temperature	-10°C~55°C
Dimension(W×D×H)	440mm x 300mm x 44mm
Service Characteristics	
System	Username / password: admin/admin IP Address :192.168.1.110/24
PoE Budget	Total≤240W
MAC Table	8K
NTP	Support
DHCP	Support DHCP client/server Support DHCP snooping
VLAN	802.1Q Standard VLAN
Port Aggregation	Manual aggregation/LACP
Mirroring	Many-to-one port mirroring
Flow Control	Half-duplex based on back pressure type control; Full duplex based on PAUSE frame
Multicast	IGMP Snooping v1/v2/v3
Security Features	User management, SSH, HTTPS, SNMP v1/v2/v3, ROMN, ACL, IP source guard, ARP inspection, 802.1x, loop protection
Spanning tree	Support STP/RSTP/MSTP
LLDP	Support
MAC Table	Support MAC address table configuration
QoS	Support QoS base on CoS/DPL/PCP/DEI Each port support 8 output queue Support port shaping Support port tag remarking Support QoS base on DSCP
System Maintenance	Support the configuration file upload/download Support the updated packet upload System log
Network Management	WEB (http protocol), serial, SNMP