



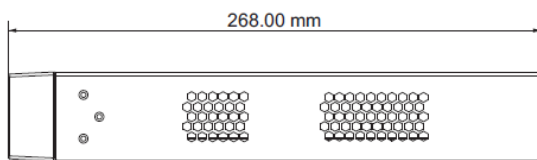

NVR 16 Canali IP

NVR 16 canali IP, registrazione fino a 8 Mp, H265/H264, massima banda in REC 160Mbps, in Tx 160Mbps, analisi video avanzata compresa Face Detection, dewarping per telecamere Fisheye, 8 ingressi e 4 uscite di allarme con relè programmabile su eventi multipli, 2 uscite video principali (HDMI 3840x2160, VGA), 1 ingresso e 1 uscita audio bidirezionale, predisposto per montaggio di 2 dischi SATA fino a 10TB, 2 porte USB (mouse, backup), 2 LAN 10/100/1000Mbps, RS485 (PTZ), visibile da iPhone, iPad, Android, alimentazione esterna a 12Vdc (alimentatore in dotazione) max 10W senza HD, compatibile ONVIF, con HD da 2TB installato. (380.0 x 268.0 x 45.0 mm)


PIXVIDEO

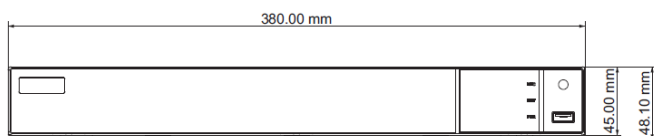

CARATTERISTICHE TECNICHE

Technical Specification

Model	NVR161A2-B
System	
OS	Embedded Linux
Video	
Network Input	16 CH IPC input
Incoming/Outgoing Bandwidth	160Mbps / 160Mbps
Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Output	HDMI x 1: 1024x768 / 1280x1024 / 1920x1080 / 3840x2160@30fps / 3840x2160@60fps VGA x 1: 1024x768 / 1280x1024 / 1920x1080
Compression	Standard H.264 / H.265
Audio	
Network Input	16 CH IPC audio input
2-way Audio	RCA × 1
Local Output	RCA × 1
Compression	G.711(U/A)
Record	
Record Stream	Dual stream recording
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Frame Rate	NTSC: 30fps; PAL: 25fps
Playback	
Simultaneous Playback	Max 16CH
Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	
Live View/Playback	1CH 8MP/ 4CH 1080P
Alarm	
Mode	Manual, sensor, motion, exception, smart events
Input	8 CH local alarm input; supports IPC alarm input
Output	4 CH
Triggering	Record, snap, preset, e-mail, etc.
Face	
Channel	16 CH
Face Picture Database	32 libraries, 5000 Face Pictures
Comparison Capability	180 pictures / minute
Face Picture Search	Search by picture is supported
Database Management	Add, modify, delete and search face pictures
Face Picture Adding	Add face pictures through APP, WEB and external import
External face picture enrollment	Resolution : 128 x 128 ~ 1920 x 1080, Size : ≤ 70KB, Format : jpg&jpeg
Face Picture Comparison	Supports allow list and block list alarm
Face Track	Yes



Map of face Track	Resolution: ≤2560 x 1920 Size: ≤ 512KB Format: jpg&jpeg
Statistic Graph of Face Information	Bar graph, pie chart
Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period
Network	
Interface	RJ 45 1000 Mbps × 2
Protocol	TCP / IP, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x PPPoE
Mobile Device	
OS	iOS, Andriod
Storage	
HDD Interface	SATA × 2, max 10T per HDD
Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
Port	
USB	USB 2.0 × 1, USB 3.0 × 1
Remote Controller	Optional
RS 485	Yes (full-duplex), connect to PTZ or keyboard
Others	
Power Supply	DC12V/4A
Consumption	≤ 10W (without HDD)
Dimensions (mm)	380 × 268 × 45 (W × D × H)
Work Environment	-10 ~ 50 °C, 10% ~ 90% humidity