



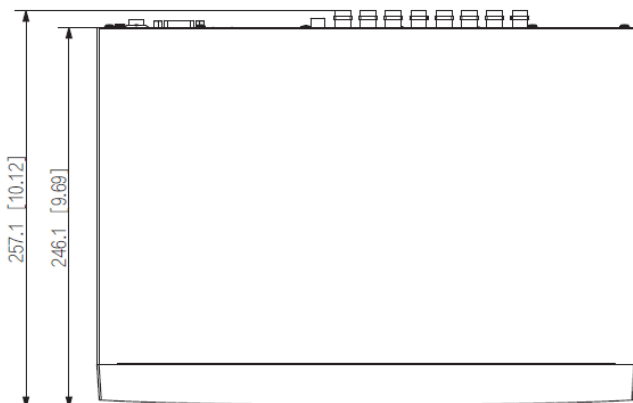

PENTA-IBRIDO 16 canali

PENTA-IBRIDO 16 canali, HDCVI fino a 4K o 16+16 IP fino a 8Mp in registrazione, NVR (IP) - (analogico) PAL, AHD e TVI fino a 4K, H265+/H264, rapporto risoluzione/frame e bit rate variabile (32~6.144Kbps) per singolo canale, massima banda in REC. 128Mbps, 2 uscite video principali (VGA, HDMI), 16 ingressi e 1 uscita audio bidirezionale, slot per 1 disco SATA fino a 16TB, 2 porte USB (mouse, backup), 1 porta LAN 1000Mbps, RS485 (PTZ), analisi video intelligente, alimentazione esterna a 12Vdc (in dotazione) max 15W senza disco fisso, compatibile ONVIF, con HD da 2TB installato. (325.0mm×257.1mm×55.0mm)

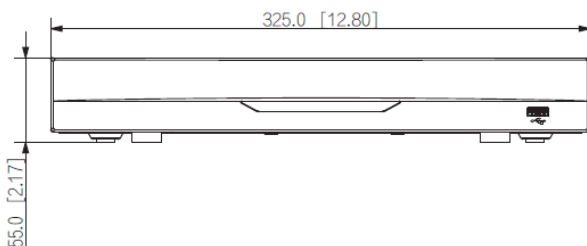

CARATTERISTICHE TECNICHE

Technical Specification

Model **NVX167M2**

System

Main Processor Industrial-grade processor

Operating System Embedded Linux

Operating Interface Web; Local GUI

Perimeter Protection

Perimeter Performance AI by Recorder (Number of Channels) Advanced Model: 2 channels, 10 IVS for each channel
General Model: 8 channels, 10 IVS for each channel

Face Detection

Face Attributes Gender; age group; glasses; expressions; face mask; beard

Face Detection Performance of AI by Recorder (Number of Channels) 2 channels (up to 12 face images/s)

Face Recognition

Face Database Capacity Up to 10 face databases with 20,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries[®]ions and state can be added to each face picture

Face Recognition Performance of AI by Recorder (Number of Channels) 2 channels

SMD Plus

SMD Plus by Recorder 16 channels: Secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change, secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change

Audio and Video

Analog Camera Input 16 BNC ports, CVI access by default, supports HDCVI/AHD/TVI/CVBS auto-detect

Camera Input 1. CVI: 4K, 6 MP, 5 MP, 4 MP, 1080P@25/30 fps, 720P@50/60 fps, 720P@25/30 fps.
2. TVI: 4K, 5 MP, 4 MP, 3 MP, 1080P@25/30 fps, 720P@25/30 fps.
3. AHD: 4K, 5 MP, 4 MP, 3 MP, 1080P@25/30 fps, 720P@25/30 fps.

IP Camera Input Up to 32 channels of IPC access 16 IP channels by default + 16 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps
*After IP channels are added beyond the existing channels, the AI Function (IVS, SMD, FACE) will be disabled.

HDD Interface	1 SATA port, up to 16 TB, the maximum HDD capacity varies with environment temperature
RS-485	1
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)
Compression Standard	
Power Supply	12 VDC, 3 A
Power Consumption	Lower than 15 W (without HDD)
Net Weight	1.23 kg (2.71 lb)
Gross Weight	2.11 kg (4.65 lb)
Product Dimensions	Mini 1U, 325.0 mm × 257.1 mm × 55.0 mm (12.80" × 10.12" × 2.17") (W × D × H)
Packaging Dimensions	372.0 mm × 117.0 mm × 308.0 mm (14.65" × 4.61" × 12.13") (W × D × H)
Operating Temperature	−10 °C to +55 °C (−14 °F to +131 °F)
Operating Humidity	10%–90% (RH)
Installation	Desktop
Certifications	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B

Encoding Capacity	Main stream: All channels 4K@ (1-7 fps); 6 MP@ (1-10 fps); 5 MP @ (1-12 fps); 4K-N/4 MP/3 MP@ (1-15 fps); 4M-N/1080P/720P/960H/D1/CIF (1 fps–25/30 fps); Sub stream: 960H@ (1 fps–15 fps); D1/CIF@ (1 fps–25/30 fps)
Dual-stream	Yes
Video Frame Rate	PAL: 1 fps–25 fps NTSC: 1 fps–30 fps
Video Bit Rate	32 kbps–6144 kbps per channel
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25/36
Third-party Camera Access	Onvif, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung
Compression Standard	
Video Compression	AI Coding/H.265+/H.265/H.264+/H.264
Audio Compression	G.711A/G.711u/PCM
Network	
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, P2P
Mobile Phone Access	IOS, Android
Interoperability	ONVIF 21.06, CGI Conformant
Browser	Chrome, IE9 or later, Firefox
Network Mode	Single-address mode
Recording Playback	
Record Mode	General, motion detection; intelligent; alarm; POS
Recording Playback	When the AI Function (IVS, FACE) is not enabled: 1/4/9/16 When the AI Function (IVS, FACE) is enabled: 1/4/9
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Alarm	
General Alarm	Motion detection, video loss, tampering, and local alarm
Anomaly Alarm	No disk, storage error, low space, offline, IP conflict, MAC conflict
Intelligent Alarm	Face detection, face recognition, perimeter protection
Alarm Linkage	Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email
Ports	
Audio Input	1-channel RCA (external) 16-channel BNC (coaxial audio)
Audio Output	1-channel RCA
Two-way Talk	Yes (share the same audio input with the first channel)