




Postazione esterna IP o bifilare

Postazione esterna modulare IP o bifilare, in alluminio con telecamera sensore 2MP CMOS e illuminazione IR led, connessione tramite porta LAN, 1 uscita a relè per comando apri porta mono familiare espandibile con modulo relè VAE010R su RS485 (max. 1), 2 ingressi di allarme, alimentazione 12Vdc o Standard PoE (802.3af) o con VAE064-2 e VAE025, consumo massimo 12W, montaggio a incasso o in superficie con appositi contenitori opzionali, grado IP65 (con utilizzo di silicato di sodio liquido), antivandalica IK07, temperatura di esercizio -20 ~ +60°. (100.0x100.0x49.3mm). Compatibile per sistemi ibridi bifilari.

PIXVIDEO

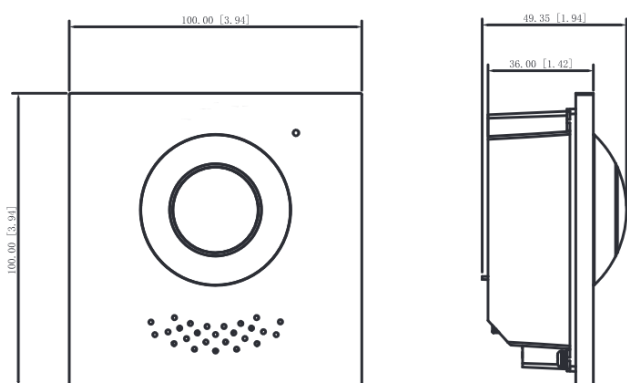

Operating Humidity	10%–90% (RH, non-condensing)
Operating Altitude	0 m–3000 m
Power Consumption	≤ 12W
Net Weight	0.35 kg (0.77lb)
Gross Weight	0.4 kg (0.88lb)

CARATTERISTICHE TECNICHE

Technical Specification

Model	VEM030A
System	
Main Processor	Embedded processor
Operating System	Embedded Linux Operation System
Button Type	Mechanical
Interoperability	ONVIF; CGI
Network Protocol	SIP; P2P; IPv4; UPnP; SNMP; DNS; DDNS; RTSP; RTP; TCP; UDP
Basic	
Camera	1/2.5" 2MP CMOS Low Illumination HD Colorful Fisheye Camera
Field of View	Horizontal: 168.6°; Vertical: 87.1°; Diagonal: 176.7°
Focal Length	1.9 mm
WDR	120 dB
Noise Reduction	3D DNR
Video Compression	H.265
Video Resolution	50Hz: Main Stream (720P@25 fps), sub stream (1080P@25 fps) 60Hz: Main Stream (720P@30 fps), sub stream (1080P@30 fps)
Video Frame Rate	25 fps
Video Bit Rate	256 Kbps to 4 Mbps
Light Compensation	Auto IR
Day/Night	Auto (ICR)
Audio Compression	G.711a; G.711u; PCM
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	2-way voice communication
Audio Enhancement	Echo suppression/digital noise reduction
Audio Bit Rate	16 KHz, 16 Bit
Status Indicator Light	3
Port	
RS-485 Port	1
Alarm Output	1
Power Output	1-ch 12 VDC 100mA
Exit Button	1
Door Status Detection	1
Lock Control	1
Network Port	One RJ45 10M/100M network port
General	
Appearance color	Silver
Power Supply	DC 48V 1A Standard PoE
Power Adapter	Optional
Installation	Flush/surface mount
Certifications	CE; FCC; UL
Accessory	Flush/surface mount
Product Dimensions	100 mm × 100 mm × 36 mm (3.94" × 3.94" × 1.41")
Protection	IK07; IP65
Operating Temperature	–30°C to +60°C (–22°F to 140°F)

Rev. 180127

Le immagini e le caratteristiche tecniche possono subire variazioni senza preavviso da parte del produttore