




Postazione esterna IP o bifilare

Postazione esterna IP o bifilare in alluminio con telecamera sensore 2MP CMOS e illuminazione IR led, connessione tramite porta LAN, 1 uscita a relè per comando apri porta mono familiare espandibile con modulo relè VAE010R su RS485 (max. 1), 1 pulsante meccanico, alimentazione 12Vdc o Standard PoE (802.3af) o con VAE064-2 e VAE025, consumo massimo 12W, montaggio ad incasso o in superficie con appositi contenitori opzionali, grado IP55, antivandalica IK07, temperatura di esercizio -30 ~ +60°. (130.0x96.0x28.5mm)

PIXVIDEO

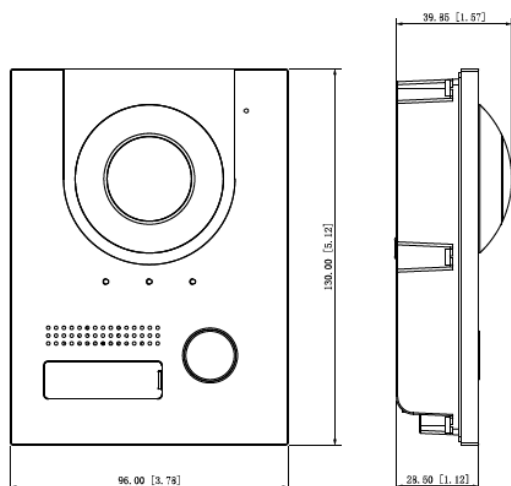

CARATTERISTICHE TECNICHE

Technical Specification	
Model	VEP013AL
System Parameter	
Host Processor	Embedded processor
Camera	1/2.8" 2MP CMOS high-definition low illumination colorful
Angle of view	D:180° H:160° V:82°
Focal length	1.95 mm
WDR	Support
Noise reduction	Noise suppression and echo cancellation
Video encoding	H.264
Frame rate	PAL:25 fps NTSC:30 fps
Audio encoding	G.711 U
Video bit rate	256K to 2M
Light compensation	IR Supplement
Port	
RS-485 Port	1
Alarm Output	1
Lock Control	1 set
Door Status Detection	1 set
Eoc	1 set
Exit Button	1
Tamper Switch	1 set
Network Interface	1
Power Output	12V/100mA
Alarm Parameter	
Tamper Alarm	Support
Door Sensor Timeout	Support
Alarm Input	Support
Alarm Output	Support
User Parameter	
Audio Input	Built-in Omnidirectional Microphone
Audio Output	Built-in Loudspeaker
Status Indicator	calling&communication&unlocked
Communication Methods	Digital communication
Unlock Mode	Remote unlocking
Auto Snapshot	Support
Leave Videos or Text Messages	Support
Storage	Extended 64 G TF Card
WEB Configuration	Support
Real-Time Monitor	Support
Normal Parameter	
Ingress Protection	IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended)
Network Update	Online update
Housing material	Aluminum
Power supply mode	2-Wire Interface or PoE
Rated Power	12V DC

Rated Current	1A
Installation method	Supports surface mounted and flush mounted
Dimensions	130 mm×96 mm×28.5 mm (5.1"×3.78"×1.1")
Working Temperature	-30°C to +60°C (-22°F to +140°F)
Working Humidity	10%–90%
Atmospheric Pressure	86kPa–106kPa
Power Consumption	≤12W
Total Weight	0.35kg/0.77lb
Environmental Requirement	Outdoor