




Monitor intercom. IP

Monitor interno intercomunicante IP con altre postazioni interne compatibili, display LCD da 7", risoluzione 1.024x600, 1 porta LAN 10/100Mbps, Wi-Fi, touch screen capacitivo e tasti per funzioni rapide, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, slot microSD-Card max 32Gb, montaggio ad applicare su muro o scatola predisposta con piastra in dotazione, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 7W. Cornice bianca. (215.0x140.0x21.0mm)

PIXVIDEO

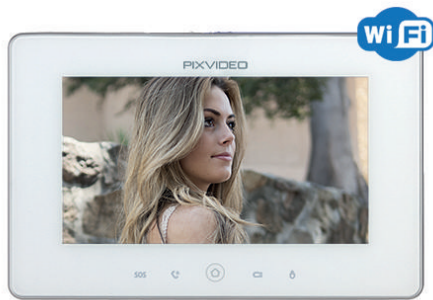

CARATTERISTICHE TECNICHE

Technical Specification

Model	VIP075W-W
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 1024x600
Operation Mode	
Input	Touch buttons and capacitive screen
Interface	
Wired Zones	6 on-board zones
Wireless Zones	8 wireless zones
Alarm Out	1
RS485	1
Network	
Wi-Fi	IEEE802.11b/g/n
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V, PoE (802.3af)
Power Consumption	Work ≤7W
Working Temperature	- 10°C to +55°C
Relative Humidity	10%RH-90%RH
Dimensions	215.0mm×140.0mm×21.0mm
Weight	0.8kg