




### Monitor interno intercomunicante IP

Monitor interno intercomunicante IP con cornetta, con altre postazioni interne compatibili, display LCD da 7", risoluzione 1.024x600, 1 porta LAN 10/100Mbps, Wi-Fi, touch screen capacitivo, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, slot microSD-Card max 32Gb, installazione da parete o da tavolo con VAM007TAV, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 5W. Cornice bianca. (236x165.5x43.2 mm)

PIXVIDEO

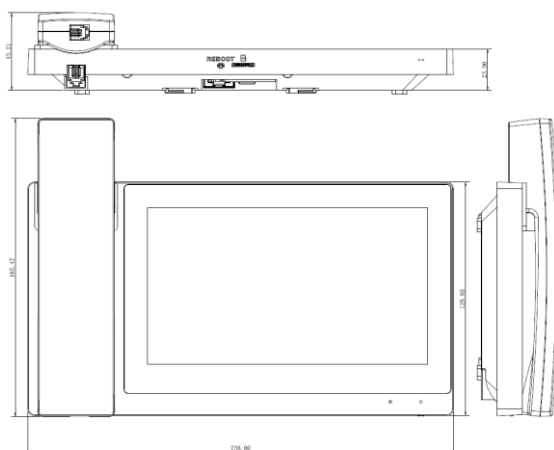

### CARATTERISTICHE TECNICHE

#### Technical Specification

|                       |                                     |
|-----------------------|-------------------------------------|
| Model                 | VIP077W-HW                          |
| <b>System</b>         |                                     |
| Main Processor        | Embedded Micro Processor            |
| Operation System      | Embedded LINUX OS                   |
| <b>Video</b>          |                                     |
| Video Compression     | H.264                               |
| <b>Audio</b>          |                                     |
| Audio Compression     | G.711                               |
| Audio Input           | All-direction Microphone            |
| Audio Output          | Built-in Loudspeaker                |
| Bidirectional Talk    | Support Dual-way Bidirectional talk |
| <b>Display</b>        |                                     |
| LCD Screen            | 7" 1024x600, Capacitive             |
| <b>Operation Mode</b> |                                     |
| Input                 | Touch screen                        |
| <b>Interface</b>      |                                     |
| Alarm In              | 6                                   |
| Alarm Out             | 1                                   |
| RS485                 | 1                                   |
| <b>Network</b>        |                                     |
| Ethernet              | 10M/100Mbps Self-adaptive           |
| Network Protocol      | TCP/IP                              |
| <b>General</b>        |                                     |
| Memory Slot           | Micro SD, Max 32GB                  |
| Installation          | Surface & Desktop                   |
| Power                 | DC 12V, PoE(802.3af)                |
| Power Consumption     | Standby ≤3.5W, Work ≤5W             |
| Working Temperature   | -10°C~+55°C                         |
| Relative Humidity     | 10%~90%RH                           |
| Dimensions            | 236mm×165.5mm×43.2mm                |
| Weight                | 0.9Kg                               |