

# PIX-ACM220

## Junction Box



- Built of aluminum alloy and is cost-effective.
- Suitable for a variety of cameras and is elegant.



### Scene

It is ideal for mounting cameras, and works in temperatures ranging from  $-40^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ ) and in environments with relative humidity of less than 90%.

### Technical Specification


#### Structure

|                      |                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------|
| Material             | Aluminum alloy                                                                                                  |
| Dimensions           | $\Phi 129.1 \text{ mm} \times 45.0 \text{ mm}$ ( $\Phi 5.08'' \times 1.77''$ )                                  |
| Color                | White                                                                                                           |
| Net Weight           | 0.4 kg (0.88 lb)                                                                                                |
| Gross Weight         | 0.58 kg (1.27 lb)                                                                                               |
| Load Bearing         | 3.0 kg (6.61 lb)                                                                                                |
| Installation         | Junction box mount                                                                                              |
| Screw Thread Type    | G 3/4                                                                                                           |
| Applicable Camera    | Please see "Accessory Selection"                                                                                |
| Product Dimensions   | 185.0 mm $\times$ 163.0 mm $\times$ 71.0 mm (7.28" $\times$ 6.42" $\times$ 2.8") (L $\times$ W $\times$ H)      |
| Packaging Dimensions | 578.0 mm $\times$ 383.0 mm $\times$ 349.0 mm (22.76" $\times$ 15.08" $\times$ 13.74") (L $\times$ W $\times$ H) |
| Packaging Method     | 30 pcs in each carton                                                                                           |

#### Environment

|                       |                                                                                                    |
|-----------------------|----------------------------------------------------------------------------------------------------|
| Operating Temperature | $-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ ) |
| Operating Humidity    | <90% (RH)                                                                                          |
| Storage Temperature   | $-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ ) |
| Storage Humidity      | 10%–90% (RH)                                                                                       |

### Installation

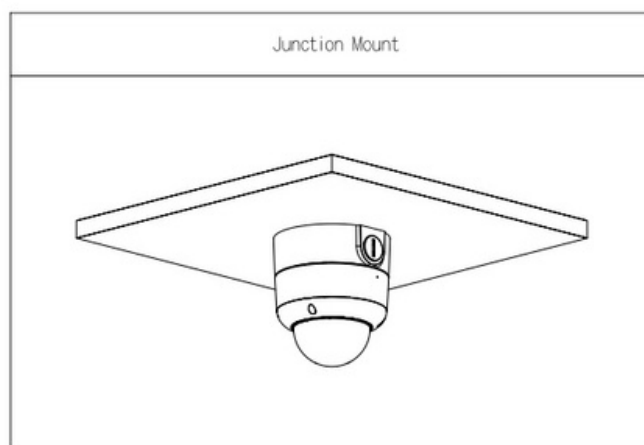

### Dimensions (mm[inch])

