

PIX-ACM256

Wall Mount Bracket



- Built of aluminum alloy and is cost-effective.
- Suitable for a variety of cameras and is elegant.



Scene

It is ideal for mounting cameras, and works in temperatures ranging from -40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$) and in environments with relative humidity of less than 90%.

Technical Specification


Structure

Material	Aluminum alloy
Dimensions	222.0 mm $\times$ 160.7 mm $\times$ 144.4 mm (8.66" $\times$ 6.33" $\times$ 5.68") (L $\times$ W $\times$ H)
Color	White
Net Weight	1.1 kg (2.42 lb)
Gross Weight	1.5 kg (3.31 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	Wall mount
Screw Thread Type	G 3/4
Applicable Camera	Please see "Accessory Selection"
Product Dimensions	219.0 mm $\times$ 218.0 mm $\times$ 275.0 mm (8.62" $\times$ 8.56" $\times$ 10.83") (L $\times$ W $\times$ H)
Packaging Dimensions	675.0 mm $\times$ 456.0 mm $\times$ 575.0 mm (26.57" $\times$ 17.95" $\times$ 22.64") (L $\times$ W $\times$ H)
Packaging Method	12 pcs in each carton

Environment

Operating Temperature	-40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$)
Operating Humidity	<90% (RH)
Storage Temperature	-40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$)
Storage Humidity	10%–90% (RH)

Installation

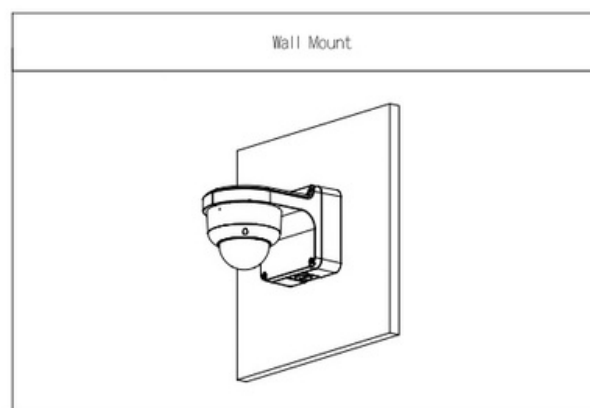

Dimensions (mm[inch])

