




Telecamera HDCVI STARLIGHT da 5Mp Antivandalo Ottica 2.7~13.5mm, IR 30mt

Telecamera Dome HDCVI STARLIGHT da 5Mp a 20Fps o 4Mp a 25Fps, da esterno/interno IP67, antivandalo IK10, sensore progressivo 1/2.8", ICR meccanico, ottica motorizzata 2.7~13.5mm con regolazione su 3 assi, luminosità 0.005Lux/F1.3 (0 Lux IR on), led IR portata fino a 30mt, 2-3D, WDR, 1 uscita video HDCVI o CVBS, OSD su coassiale, alimentazione 12Vdc <8.8W

PIXVIDEO

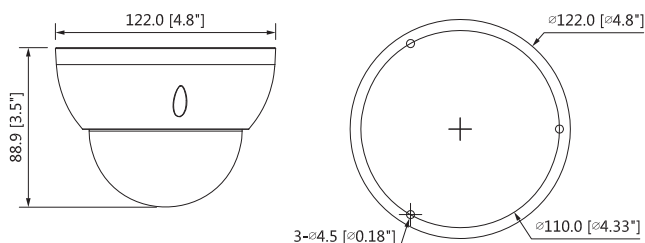

ACCESSORI (OPTIONAL)



ACM207



ACM257



ACM253



ACM262



ACM202



ACM217

CARATTERISTICHE TECNICHE

Camera	HDV501SM		
Image Sensor	1/2.8" CMOS		
Effective Pixels	2592(H)×1944(V), 5MP		
Scanning System	Progressive		
Electronic Shutter Speed	PAL: 1/4s~1/100,000s NTSC: 1/3s~1/100,000s		
Minimum Illumination	0.005Lux/F1.3, 30IRE, 0Lux IR on		
S/N Ratio	More than 65dB		
IR Distance	Up to 30m (98feet)		
IR On/Off Control	Auto / Manual		
IR LEDs	2		
Lens			
Lens Type	Motorized lens / Fixed iris		
Mount Type	Board-in		
Focal Length	2.7-13.5mm		
Max Aperture	F1.3		
Angle of View	H: 102°~29°		
Focus Control	Auto / Manual		
Close Focus Distance	200mm 7.87"		
Pan / Tilt / Rotation			
Pan/Tilt/Rotation	Pan: 0° ~ 355° Tilt: 0° ~ 75° Rotation: 0° ~ 355°		
Video			
Resolution	5MP (2592×1944)		
Frame Rate	20fps@5MP, 25/30fps@4MP, 25/30fps@1080P		
Video Output	1-channel BNC high definition video output / CVBS video output (DIP switch)		
Day/Night	Auto (ICR) / Manual		
OSD Menu	Multi-language		
BLC Mode	BLC / HLC / WDR		
WDR	120dB		
Gain Control	AGC		
Noise Reduction	2D/3D		
White Balance	Auto / Manual		
Smart IR	Auto / Manual		
DORI Distance			
Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.			
	DORI	Distance	
	Definition	Wide	Tele
Detect	25px/m (8px/ft)	64m(210ft)	222m(728ft)
Observe	63px/m (19px/ft)	26m(85ft)	89m(292ft)
Recognize	125px/m (38px/ft)	13m(43ft)	44m(144ft)
Identify	250px/m (76px/ft)	6m(20ft)	22m(72ft)
Interface			
Audio Interface	1ch in		
Electrical			
Power Supply	12V DC ±30%		
Power Consumption	Max. 8.8W (12V DC, IR on)		
Environmental			
Operating Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH * Start up should be done at above -30°C (-22°F)		
Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH		
Ingress Protection & Vandal Resistance	IP67 & IK10		
Construction			
Casing	Aluminium		
Dimensions	Φ122mm×88.9mm (Φ4.8"×3.5")		
Net Weight	0.46kg (1.0lb)		
Gross Weight	0.63kg (1.38lb)		