

EWT100-TESTER

GUIDE TO THE FIREVIBES SURVEY



WARNINGS AND LIMITATIONS

Our devices use high quality electronic components and plastic materials that are highly resistant to environmental deterioration. However, after 10 years of continuous operation, it is advisable to replace the devices in order to minimize the risk of reduced performance caused by external factors.

Ensure that this device is only used with compatible control panels.

Detection systems must be checked, serviced and maintained on a regular basis to confirm correct operation.

Smoke sensors may respond differently to various kinds of smoke particles, thus application advice should be sought for special risks.

Sensors cannot respond correctly if barriers exist between them and the fire location and may be affected by special environmental conditions.

Refer to and follow national codes of practice and other internationally recognized fire engineering standards.

Appropriate risk assessment should be carried out initially to determine correct design criteria and updated periodically.

Use only for FireVibes fire detection and alarm systems.

WARRANTY

All devices are supplied with the benefit of a limited 5 years warranty relating to faulty materials or manufacturing defects, effective from the production date indicated on each product.

This warranty is invalidated by mechanical or electrical damage caused in the field by incorrect handling or usage.

Product must be returned via your authorized supplier for repair or replacement together with full information on any problem identified.

Full details on our warranty and product's returns policy can be obtained upon request.

THE PURPOSE OF THE SURVEY KIT

A survey kit is a diagnostic system that is used to test the wireless channels or frequency bands that are used, in general, by FireVibes systems.

The aim of the test is to determine the degree of reliability of the various channels, select the less congested ones and use those for building up the FireVibes wireless system in the installation phase.

SURVEY KIT MAIN PARTS

A survey key is always composed by the following fundamental components:


- A survey network device.
- A survey detector device.
- A dongle interface device.

The **EW100-TESTER** survey kit model has these fundamental elements.

Additionally, you need an Android tablet or cellular phone for controlling and receiving a feedback from the survey system.



You need an Android tablet or cellular phone for controlling and receiving a feedback from the survey system.

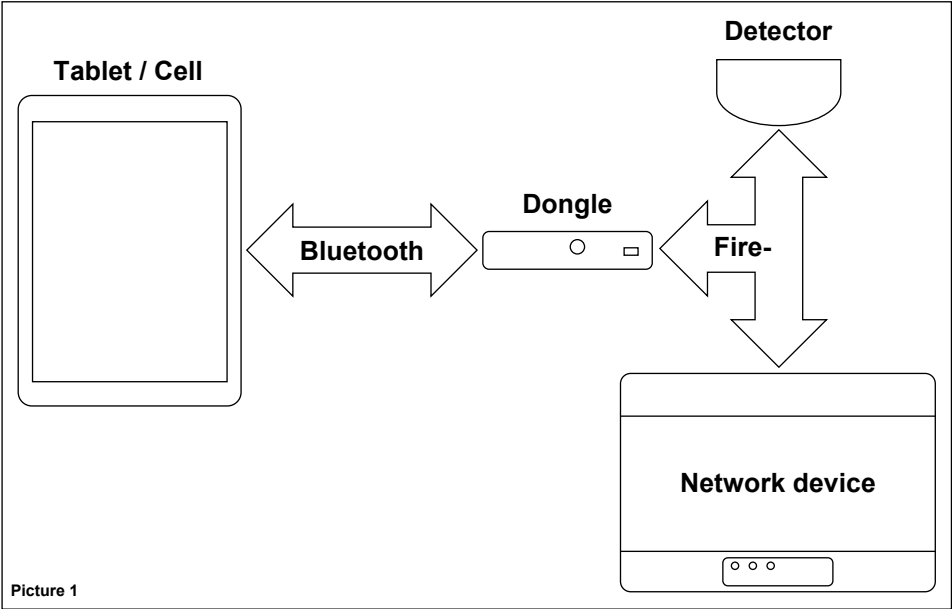

The tablet / cell communicates to the dongle device through the Bluetooth wireless protocol.

Dongle, detector and network devices of the survey system communicate between each other through the FireVibes wireless protocol.

3. THE UNIQUE IDENTIFIER

The unique identifier is a 8 alphanumeric character sequence that univocally identifies every FireVibes device that comes out of the factory; it is written in every device's permanent memory.

Unique identifier can be indicated as **UID**, **UUID** or **Unique ID**.

It is labelled below the QR code on each FireVibes device and it is encoded in the QR code.

Survey kit's dongle, detector and network devices all carry a Unique ID number.



Survey kit's dongle, detector and network devices all carry a Unique ID number.

TECHNICAL SPECIFICATIONS

Survey detector	
FireVibes RF Frequency band(s) of operation	868-868.6 MHz, 868.7-869.2 MHz, 869.4-869.65 MHz, 869.7-870.0 MHz
FireVibes RF channels	66
FireVibes RF output power (max)	14 dBm (25 mW) e.r.p.
Batteries type, number, voltage and capacity	2 x CR123A (3 V, 1.25 Ah)
Maximum allowed humidity	95% RH (non condensing)

Table 1

Survey network device	
FireVibes RF Frequency band(s) of operation	868-868.6 MHz, 868.7-869.2 MHz, 869.4-869.65 MHz, 869.7-870.0 MHz
FireVibes RF channels	66
FireVibes RF output power (max)	14 dBm (25 mW) e.r.p.
External power supply voltage	12 Vdc
Maximum current load	36 mA (12 Vdc)
Batteries type, number, voltage and capacity	4 x CR123A (3 V, 1.25 Ah)
Humidity range	5% RH to 90% RH (non condensing)
Device dimensions	235 mm x 160 mm x 70 mm
Device weight	700 g

Table 2

Dongle device	
FireVibes RF Frequency band(s) of operation	868-868.6 MHz, 868.7-869.2 MHz, 869.4-869.65 MHz, 869.7-870.0 MHz
FireVibes RF channels	66
FireVibes RF output power (max)	14 dBm (25 mW) e.r.p.
Bluetooth standards	IEEE 802.15.1 Bluetooth low energy (BLE) 4.2 specification
Batteries type, number and voltage	2 x LR6 AA (1.5 V)
Maximum load	65 mA (peak impulsive)
Allowed temperature range	-10 °C to +55 °C
Maximum allowed humidity	95 % RH (non condensing)
Dimensions	80 mm x 120 mm x 25 mm
Weight	100 g (without batteries)

Table 3

POWERING UP - SURVEY DETECTOR

- 1) Remove the survey detector from its wall adapter base. Keep the base still and rotate the detector counter-clockwise; separate the detector from its base.
- 2) Under the detector, push the closing clip and extract the battery cover.
- 3) Insert both CR123A batteries, the first one in the **Secondary** or **B** lodgement, the second one in the **Primary** or **A** lodgement.



Batteries' polarities must match the + and – signs printed on the detector.

- 4) Detector's LEDs will flash for some seconds: wait that their blinking stops.
- 5) Reinstall the battery cover.
- 6) Reinstall the detector on the adapter base.
- 7) The survey detector is powered on.



Always remember to remove the batteries after you have finished using the survey test system: this will avoid discharging them.

POWERING UP - DONGLE DEVICE


- 1) From the back of the dongle device, slide off the batteries' cover.
- 2) Insert both AA into the batteries' lodgement.



Batteries' polarities must match the + and – signs printed in the lodgement.

- 3) Reinstall the batteries' cover.
- 4) Switch on the device.

Picture 2

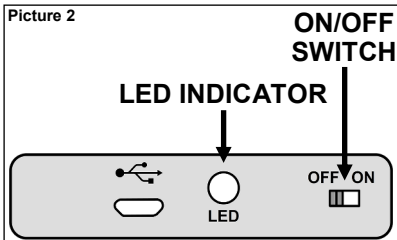

- 5) Dongle's LED performs some red-green blinking for a few seconds.
- 6) Dongle's LED starts blinking red every second: the device is now powered on.



Always remember to switch off the dongle after you have finished using the survey test system: this will avoid discharging the batteries.
If you intend not to use the dongle for a long period, remove the batteries.


POWERING UP - SURVEY NETWORK DEVICE

The survey network device can be power supplied either externally or by batteries.

If the survey network device has batteries installed and is connected to the wall power supply, priority is given to the external source, so as to prolong batteries' lifespan.

INSTALLING THE BATTERIES

- 1) Remove the two plastic screw covers from the front side. Lifting the protective covers using the gaps at their angles makes this operation easier.




- 2) Remove the four sealing plastic screws.



- 3) Remove the front protective cover.

4) Insert the four CR123A batteries into their lodgements.

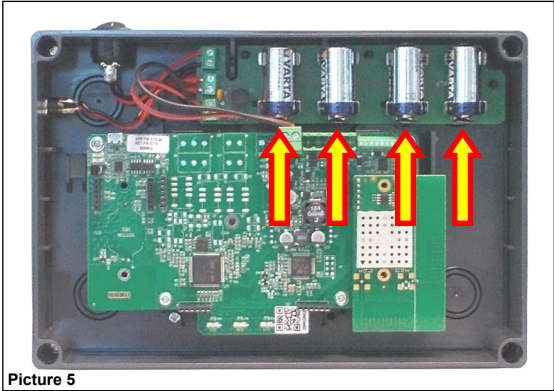

Picture 5



Batteries' polarities must match the + and – signs printed on the batteries' board.



If you intend not use the network device for a long period, and you have batteries in it, remember to remove them.

5) Reinstall the front cover.

6) Screw the front cover.

7) Reinstall the plastic screw covers.

PLUGGING IN THE DEVICE

Survey kit provides a 12 V wall adapter power supply; its output jack can be inserted into the socket on the side of the network device.



Picture 6

SWITCHING ON

Survey network device's on/off switch is located on the top side.

1) Switch on I.


All three LED blink once.

After, the power on LED blinks green every second: the survey network device is powered on.

2) Finished using the device, switch to O.



When you have finished using the network device, switch it off, especially if you are using batteries' power supply; this will avoid running them out.




Picture 7

ELEVATING THE TEST DEVICES

If a wireless network or a child device are intended to be installed at a certain height from the floor, to test the signal's reliability from that position it is necessary to elevate the test survey's devices to the planned installation height. For this purpose, the survey kit provides an elevating assemblable pole.

For the survey detector's height extension assemble the supplied pole as follows in the picture:

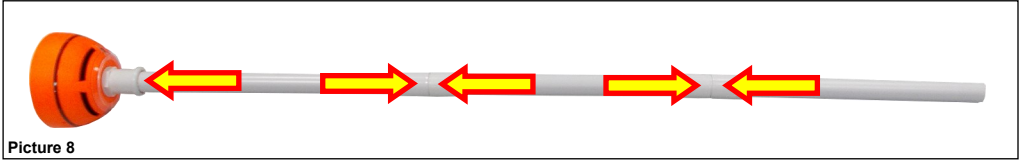

Picture 8

Pole's end has to be inserted into the survey detector's lodgement as follows:



Picture 9

! Please mind that the pole's assemblable segments are fitted in but not blocked !

! Make sure the pole is well and safely inserted into the survey detector's adapter.

! Make sure the detector's wall base and the network device's cover are safely installed and blocked.

! For safety reasons, do not elevate the survey devices more than 2 meters from the floor.

OVERVIEW OF FIREVIBES SYSTEMS

FireVibes systems are always composed by a central node device (**EWT100** or **IWT100**), a certain number of child devices (detectors, call points, sounders, etc.) and, if the wireless coverage area needs to be extended, one or more expansion nodes (**XWT100**).

The model of the central node selected by the installer depends by the control panel's type; if the control panel is intelligent and uses the Vega protocol, a **EWT100** model has to be chosen; if the control panel is conventional, the choice must fall on the **IWT100** model.

Communication ranges of the wireless devices are limited: add **XWT100** devices to the system to cover completely the fire protected area.

Child devices are linked to **EWT100**, **IWT100** and **XWT100** network devices.

Purpose of the installation process is to integrate the wireless FireVibes system with the control panel.

WIRELESS CHANNELS

The FireVibes system has a total of 66 wireless channels or frequency ranges that can be used for communicating data.

These channels are paired in fixed predefined patterns (see appendix A at the end of this manual for their list).



Channel pairs have specialized uses:

- **Field channels:** used by network devices (**EWT100**, **IWT100** and **XWT100**) for communicating with their own child devices (detectors, call points, etc.).
- **Network channels:** used by network devices (**EWT100**, **IWT100** and **XWT100**) to communicate between each other.

All child devices use a **local field channel pair**.

All network devices use a **local field channel pair** and a **global network channel pair**.

The reason for this channel's pairing system policy stems from the necessity to grant wireless connection security by having a "spare channel"

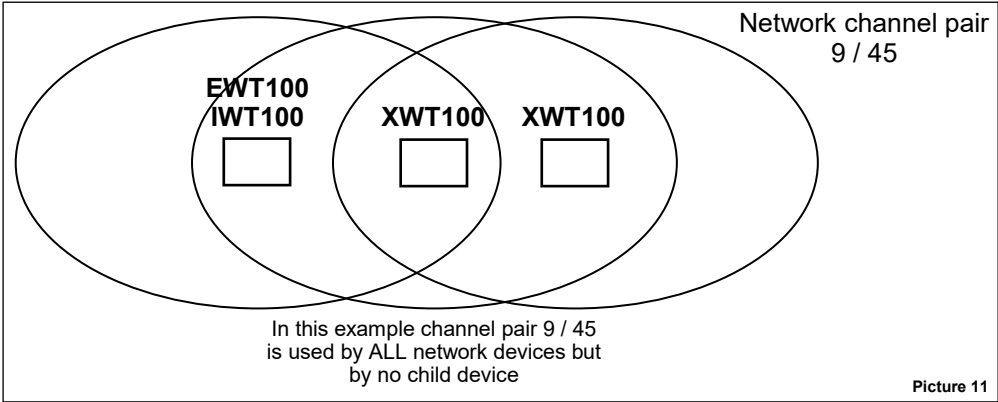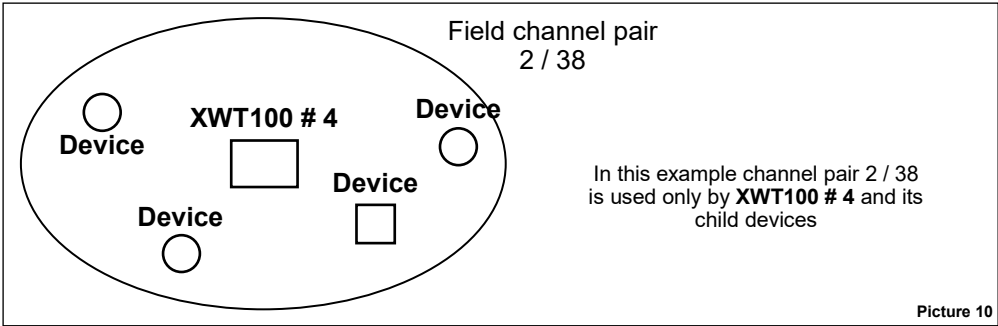

in case the other one fails.

THE PURPOSE OF SURVEYING

The purpose of using the survey kit and performing this type of surveying in general, is to test and determine which wireless channels are best to be used for a wireless FireVibes system.

Channels that undergo survey are:

- Network channels (used by network devices, only, throughout the system).
- Field channels (used locally by network devices and their child devices).
- Wireless channels used for the "discovery" operation (wireless channels used only during installation).

PERFORMING THE SURVEY

This paragraph gives you general guidelines on how to perform a survey test. The survey procedure is well described in the **HOW TO PERFORM A SURVEY** paragraph, but here an introduction to the procedure is given.


CENTRAL NODE

- 1) Place the dongle in the position where you want to install the central node.
- 2) Position yourself with the tablet / cell near the dongle.
- 3) The network device and survey detector are not involved in this operation.




CENTRAL NODE'S CHILD DEVICE

- 1) Place the survey network device where you want to install the central node.
- 2) Place the survey detector in the location where you want to install the child device.
- 3) Position yourself with the table / cell and dongle device near the survey detector.

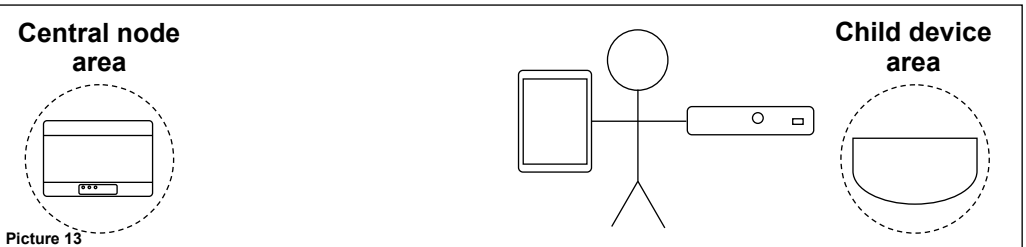


CHILD EXPANDER

- 1) Place the survey network device where you want to install the central node or the parent expander.
- 2) Place the dongle and the survey detector in the position where you want to install the "child" expander.
- 3) Position yourself with the table / cell near the dongle and the survey detector.

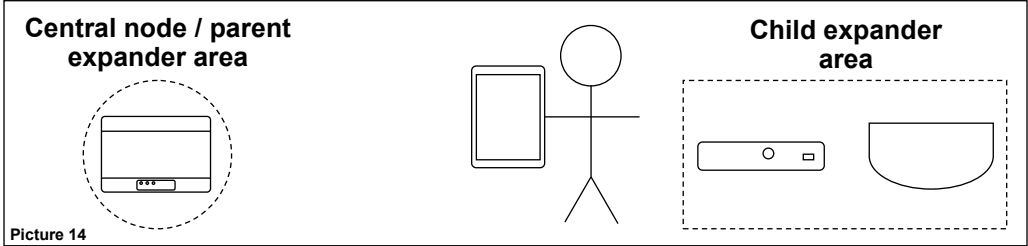

EXPANDER'S CHILD DEVICE

- 1) Place the survey network device where you want to install the parent expander device.
- 2) Place the survey detector in the location where you want to install the child device.
- 3) Position yourself with the table / cell and dongle device near the survey detector.

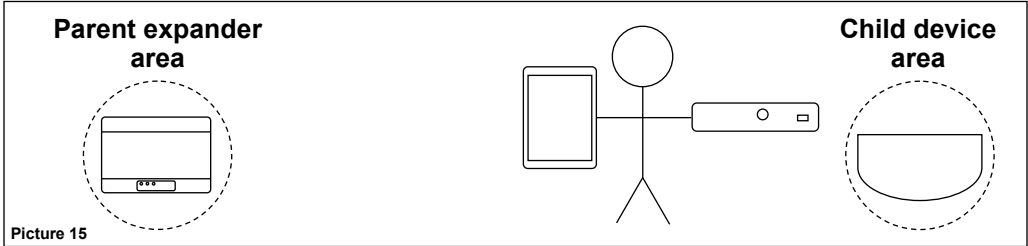

THE FIREVIBES SURVEY

FireVibes Survey is the app software used on the Android tablet / phone to drive the survey system.

Survey tests and their results are started and gathered through this app.

INSTALLING THE FIREVIBES SURVEY

If not already installed on your Android tablet / phone, the **FireVibes Survey** app can be downloaded from the "Google Play Store".


- 1) Tap the "Play Store" icon on your table / phone.
- 2) Look for **FireVibes Survey**.
- 3) Select **FireVibes Survey**.
- 4) Download and install the **FireVibes Survey** app.

LAUNCHING THE FIREVIBES SURVEY

To launch the **FireVibes Survey**, tap its icon on the screen.

FIREVIBES SURVEY - THE MAIN WINDOW

Once launched, the main window appears:

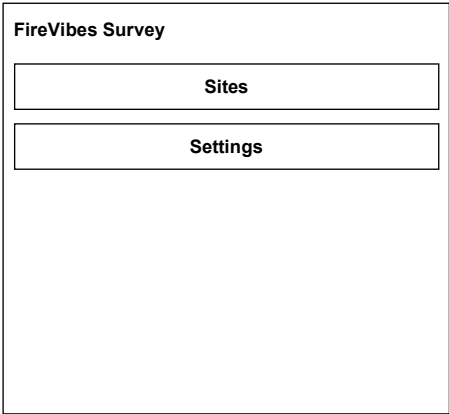

You have the following options:

Sites	This option gives you access to the management of the installation sites you have added (My Sites window).
Settings	This option permits you to configure the survey system in the settings window.

ADD A NEW INSTALLATION SITE

To add a new site to your app, press **Sites** on the **FireVibes Survey** main window; the **My Sites** window appears:

My Sites

No available sites

Add a new site

Tap **Add a new site**; the **New site** window appears on the screen:

New site

Name

Address

Building

Floor

Description

Save

Tap on the single lines to add specific site's data:

Name	The name of the installation site.
Address	The address of the installation site.
Building	The building number or name of the installation site.
Floor	The floor number where the installation site is located.
Description	The description of the installation site.


Press **Save** to generate the new virtual site.

MANAGING THE INSTALLATION SITES

1) From the **FireVibes Survey** main window press **Sites**:



2) Tap on the arrow at the left of the desired site's line:

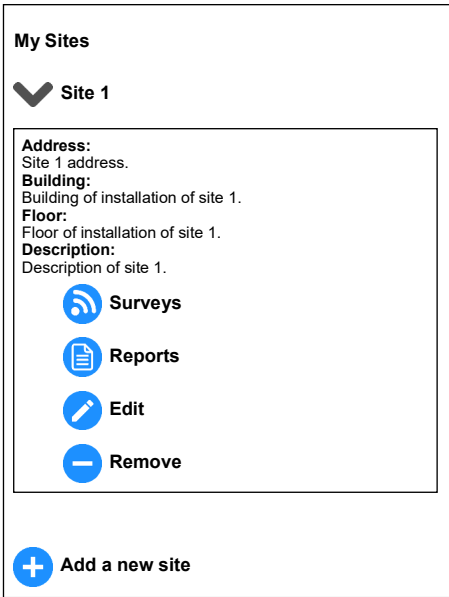

Information about the selected site is spread under the line, together with three command options:

Surveys	You can add, remove, manage and perform surveys; you can generate survey reports.
Reports	Detailed data on performed surveys is given in survey reports. Reports can be shared and exported. This option gives you access to the reports generated for the surveys related to this site.
Edit	You can modify the site's data you entered before (Edit site window).
Remove	You can remove the virtual site from the device. Confirmation will be requested.



Removing a site, removes all its surveys related to it.
Generated reports are not deleted.

ADD A NEW SURVEY

- 1) From the **FireVibes Survey** main window press **Sites**.
- 2) Tap on the arrow at the left of the desired site's line.
- 3) Tap the **Surveys** option:

Site 1 - My Surveys

No available surveys

Add a new survey

Generate site report

- 4) Tap **Add a new survey**:

New survey

Site

TX/EXP

Name

Description

Location

Save

The following fields can be edited:

Site	The name of the virtual site. This field cannot be edited directly.
TX/EXP	The model of the central node of the system. TRSL (Translator) if you are using an intelligent Vega control panel. C_EXP (Conventional expander) if you are using a conventional control panel.
Name	The name identifying this specific survey.
Description	A more detailed description of this survey.
Location	Where this survey test will take place.

Press **Save** to generate the new virtual survey.

A survey always requires the definition of a site.

An installation site can have more than one survey.

MANAGING SURVEYS

- 1) From the **FireVibes Survey** main window press **Sites**.
- 2) Tap on the arrow at the left of the desired site's line.
- 3) Tap the **Surveys** option.
- 4) Tap on the arrow at the left of the desired survey's line:

Site 1 - My Surveys

Survey 1

?

Site:
Site 1

Description:
Survey 1 description

Location:
Location of the central node

➡

Select

✎

Edit

—

Remove

+

Add a new survey

📄

Generate site report

Information about the selected survey is spread under the line, together with three command options:

Select	Press this command icon to perform effectively the survey. This operation will be explained later in detail.
Edit	You can modify the survey's data you entered before (Edit survey window).
Remove	You can remove the virtual survey from the device. Confirmation will be requested.

!

Removing a survey, will not delete the corresponding generated reports.

SETTING THE SURVEY SYSTEM

Before launching the application, make sure that:

- 1) Tablet / cell's Bluetooth is activated.
- 2) Tablet / cell's localization is activated.
- 3) Launch the **FireVibes Survey** app.
- 4) Press the **Settings** options on the main window:

FireVibes Survey

Associate your dongle

Bluetooth state: Enabled
Position state: Enabled
Dongle is: not associated

Dongle UID

Network Device UID

Child Device UID

Save

The following lines indicate the actual configuration state:

Bluetooth state	Indicates whether the required Bluetooth connection is activated or not. Disabled: Bluetooth is not activated. Enabled: Bluetooth is activated.
Position state	Indicates whether the required localization feature of the tablet / cell is activated or not. Disabled: localization is not activated. Enabled: localization is activated.
Dongle is	The association status with the tablet / cell device with the dongle interface device. Associated: the device is associated to the dongle. Not associated: the device is not associated to the dongle.

- 5) To make the survey system work, the tablet / cell device has to be associated with the dongle, the network device and the "detector" supplied with the **EWТ100-TESTER**; fill out the following fields:

Dongle UID	Insert here the Unique Identifier of the dongle device; UID is written under the QR code label placed on the device itself.
Network Device UID	Insert here the Unique Identifier of the network device; QR code labels are located internally and externally of the device.
Child Device UID	Insert here the Unique Identifier of the "detector" device of the kit. QR code and UID are placed under the device.

- 6) Check that the dongle device is switched on.
- 7) Tap the **Associate your dongle** button.

The **Trying to connect to dongle...** message appears on the screen.

- 8) Wait a few seconds that the dongle's association completes.
- 9) Tap the **Save** button.
- 10) Return to the app's main screen.



During association, check that the dongle device is switched on.




At the end of the configuration, state lines must indicate as follows:


Bluetooth state: Enabled
Position state: Enabled
Dongle is: associated

HOW TO PERFORM A SURVEY

CENTRAL NODE'S SURVEY

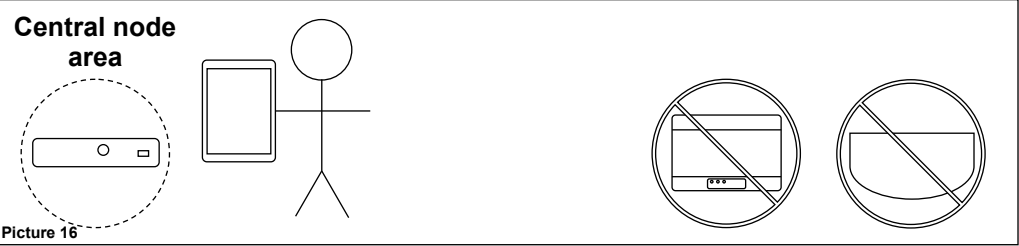

- 1) From the **FireVibes Survey** main window press **Sites**.
- 2) Tap on the arrow at the left of the desired site's line.
- 3) Tap the **Surveys** option.
- 4) Tap on the arrow at the left of the desired survey's line.
- 5) Press **Select**:

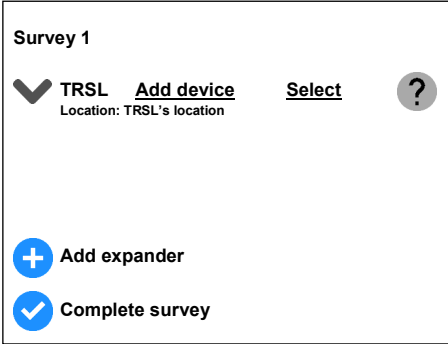

- 6) Press **Select** on the survey **TRSL**'s line.



Make sure the dongle is powered on, so also the survey detector and the survey network device. These devices are to be set and associated in the Settings window.

The following window appears:

Survey 1

Device

Description

Location

Note

Last modifications

 Edit

 Remove

 Start scan

Scan result: UNKNOWN 



 Photo

giving you the following options:

Edit	By tapping this button you can go to the Edit device window (central node device).
Start scan	Tap here to trigger the central node's survey scan.
Scan result	Gives the result of the survey scan. In this case, UNKNOWN means that it has not been performed yet.
Photo	You can snap a photo illustrating the location of the central node. This photo will be integrated in the final report.

7) Place the dongle in the position where you want to install the central node.

8) Position yourself with the tablet / cell near the dongle.

The network device and the survey detector are not involved in this operation.

9) Tap **Start scan**.

The Dongle will scan all Network channels in order to estimate the best pair at the end of Survey. Also the dongle will start to scan the field channels until to find the first pair free in order to assign those channels to the Network Device for communication with its child devices.

A **Scanning...** section of the window will appear, indicating the scanning progress.



The purpose of this scan is to give an evaluation of the degree of freeness of all network channels.



This scan is performed by the dongle device.

At the end of the test, **Scan result** visualizes one of the following:

Channel Survey Result	Evaluation
 GOOD	One or more Network channels have a Good evaluation. First pair of Field channels available have a Good evaluation.
 MARGINAL	All Network channels have a Marginal evaluation. First pair of Field channels available have a Marginal evaluation. ALLOWED
 BAD	All Network channels have a BAD evaluation. All Field channels have a BAD evaluation. NOT ALLOWED

10) Go back:

TRSL

Add device

Select

Location: TRSL's location


Add expander

Complete survey

INIM ELECTRONICS S.R.L. VIA DEI LAVORATORI 10, FRAZIONE CENTOBUCHI, 63076 MONTEPRANDONE, ITALY

20

www.inim.biz

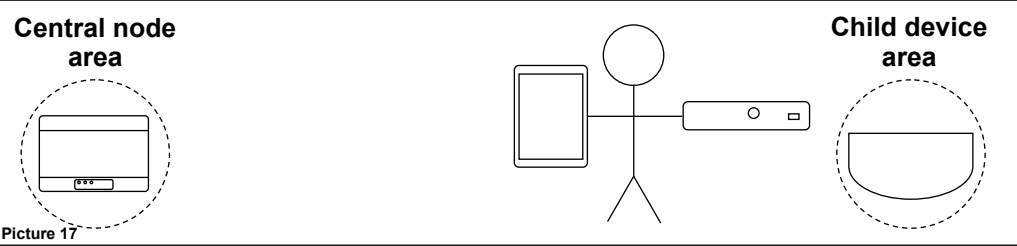

Starting from this window:

Survey 1

▼

TRSL

Add device

Location: TRSL's location

Select

✓

+

Add expander

✓

Complete survey

1) Tap **Add device** on the **TRSL** row:

New device

Device

Description

Location

Note

Save

!

The correspondence between the visualized FireVibes Survey generic device type and the specific commercial product code is to be found in appendix B of this manual.

where:

Device	The child device type. You can select the child device type by tapping on the upside-down triangle on the right; a child device list will drop down on the screen: tap and select the device type you want to insert.
Description	A description of this child device.
Location	The location of this child device.
Note	Any other note about this child device.

2) Tap the **Save** button to save the edited child device's data.

This screen appears:

Survey 1

Device

Description

Location

Note

Last modifications

 Edit

 Remove

 Start scan

Scan result: UNKNOWN 



 Photo

Where:

Edit	You can go to the child device edit window tapping here (Edit device window).
Remove	Tap here to remove this child device.
Start scan	Tap here to trigger the child device's survey scan.
Scan result	Gives the result of the survey scan. In this case, UNKNOWN means that it has not been performed yet.
Photo	You can snap a photo illustrating the location of the child device. This photo will be integrated in the final report.

- 3) Place the survey network device where you want to install the central node.
- 4) Place the survey detector in the location where you want to install the child device.
- 5) Position yourself with the table / cell and dongle device near the survey detector.
- 6) Tap **Start scan**.

The survey Network and the survey detector will communicate in order to evaluate the LINK QUALITY.

A **Scanning...** section of the window will appear, indicating the current progress of the operation.



The purpose of this scan is to give an evaluation of the degree of the wireless communication quality between the parent network device and its child device.



The scan is performed by the survey detector with the aid of the survey network device.

At the end of the test, **Scan result** visualizes one of the following:

	GOOD	Wireless communication quality has a GOOD final evaluation.
	MARGINAL	Wireless communication quality has a MARGINAL final evaluation.
	BAD	Wireless communication quality has a BAD final evaluation.

7) Go back:

Survey 1



TRSL

Add device

Select



Location: TRSL's location



OPT

Select



Location: child device's location




Add expander



Complete survey

Survey Result	Mark indication Taurex	Evaluation
 GOOD	4	Wireless communication quality has an Excellent evaluation
 GOOD	3	Wireless communication quality has a Good evaluation
 MARGINAL	2	Wireless communication quality has a Marginal-Poor evaluation NOT ALLOWED
 BAD	1	Wireless communication quality has a Bad evaluation NO COMMUNICATION

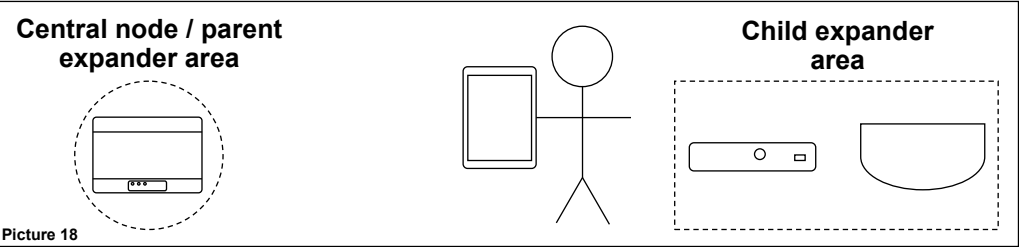

Starting from this window:

Survey 1

**TRSL**Add deviceSelect

Location: TRSL's location

OPTSelect

Location: child device's location

Add expander

Complete survey

1) Tap Add expander:

New device

Device

Description

Location

Target device

Note

Save

2) Edit:

Device	The expander device type. Click on the upside-down triangle to have a drop-down list of the selectable device types (EXP).
Description	A description of the expander device.
Location	Where this expander device is intended to be installed.
Target device	Which device, of the virtual system, is the parent device. It can be the central node TRSL / C_EXP or an expander EXP . For better identifying the target / parent device it is warmly suggested to add its location, so options come out with TRSL - Corridor , EXP - Office and so on.
Note	Any useful note you want to add to this virtual device.

3) Tap **Save** to add this new expander device.



For better identifying the target / parent device it is warmly suggested to add its location, so target device options come out with **TRSL - Corridor**, **EXP - Office** and so on.

Survey scan window for the expander appears:

Survey 1

Device

Description

Location

Target device

Note

Last modifications

 Edit

 Remove

 Start scan

Scan result: UNKNOWN 



 Photo

Edit	You can go to the expander edit window tapping here (Edit device window).
Remove	Tap here to remove this expander.
Start scan	Tap here to trigger the expander's survey scan.
Scan result	Gives the result of the survey scan. In this case, UNKNOWN means that it has not been performed yet.
Photo	You can snap a photo illustrating the location of the expander device. This photo will be integrated in the final report.

- 4) Place the survey network device where you want to install the parent expander or the central node.
- 5) Place the dongle and the survey detector in the position where you want to install the "child" expander.
- 6) Position yourself with the table / cell near the dongle and the survey detector.
- 7) Tap **Start scan**.

The Dongle will scan all Network channels in order to estimate the best pair at the end of Survey. Also the dongle will start to scan the field channels until to find the first pair free in order to assign those channels to the Network Device for communication with its child devices. When channel scanning finish, the survey Network and the survey detector will communicate in order to evaluate the LINK QUALITY.

A **Scanning...** section of the window will appear, indicating the current progress of the operation.



The purpose of this scan is to give an evaluation of the degree of freeness of all network channels, then evaluate the wireless communication quality between the parent network device and the child expander.



This scan is performed by the dongle device and the survey detector, with the aid of the survey network device.

At the end of the test, **Scan result** visualizes one of the following:

Channel Survey Result	Evaluation
 GOOD	One or more Network channels have a Good evaluation. First pair of field channels available have a Good evaluation. Wireless communication quality has an Excellent/Good (Mark 4/3) evaluation
 MARGINAL	All Newtork channels have a Marginal evaluation. First pair of Field channels available have a Marginal evaluation. Wireless communication quality has a Marginal-Poor (Mark 2) evaluation NOT ALLOWED
 BAD	All Network channels have a BAD evaluation. All Field channels have a Bad evaluation. Wireless communication quality has a Bad (Mark 1) evaluation NO COMMUNICATION

- 8) Go back:

Survey 1

 **TRSL** Add device Select 


Location: TRSL's location

 **EXP** Add device Select 

Location: EXP's location

 **Add expander**

 **Complete survey**

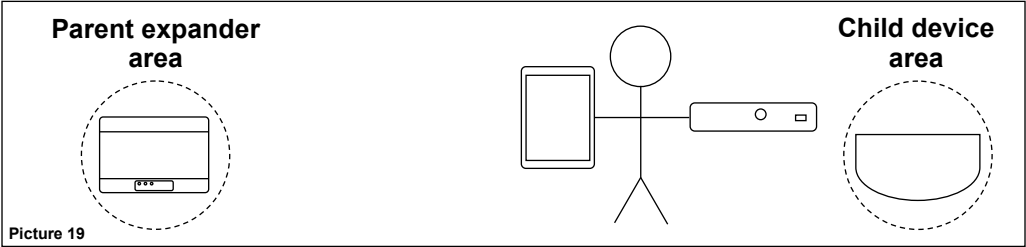

Starting from this window:

Survey 1

>

TRSL

Add device

Location: TRSL's location

Select

✓

>

EXP

Add device

Location: EXP's location

Select

✓

+

Add expander

✓

Complete survey

1) Tap **Add device** on the **EXP** line:

New device

Device

▼

Description

Location

Note

Save

2) Edit:

Device	The child device type. You can select the child device type by tapping on the upside-down triangle on the right; a child device list will drop down on the screen: tap and select the device type you want to insert.
Description	A description of this child device.
Location	The location of this child device.
Note	Any other note about this child device.

3) Tap the **Save** button to save the edited child device's data.

This screen appears:

Survey 1

Device

Description

Location

Note

Last modifications

 Edit

 Remove

 Start scan

Scan result: UNKNOWN 



 Photo

where:

Edit	You can go to the child device edit window tapping here.
Remove	Tap here to remove this child device.
Start scan	Tap here to trigger the child device's survey scan.
Scan result	Gives the result of the survey scan. In this case, UNKNOWN means that it has not been performed yet.
Photo	You can snap a photo illustrating the location of the child device. This photo will be integrated in the final report.

- 4) Place the survey network device where you want to install the parent expander device.
- 5) Place the survey detector in the location where you want to install the child device.
- 6) Position yourself with the table / cell and dongle device near the survey detector.
- 7) Tap **Start scan**.

The survey Network and the survey detector will communicate in order to evaluate the LINK QUALITY.

A **Scanning...** section of the window will appear, indicating the current progress of the operation.



The purpose of this scan is to give an evaluation of the degree of the wireless communication quality between the parent network device and its child device.



The scan is performed by the survey detector with the aid of the survey network device.

At the end of the test, **Scan result** visualizes one of the following:

	GOOD	Wireless communication quality has a GOOD final evaluation.
	MARGINAL	Wireless communication quality has a MARGINAL final evaluation.
	BAD	Wireless communication quality has a BAD final evaluation.

8) Go back:

Survey 1



TRSL

[Add device](#)

[Select](#)



Location: TRSL's location

OPT

[Select](#)



Location: child device's location



EXP

[Add device](#)

[Select](#)



Location: EXP's location

OPT

[Select](#)



Location: child device's location

 Add expander

 Complete survey

Survey Result	Mark indication Taurex	Evaluation
 GOOD	4	Wireless communication quality has an Excellent evaluation
 GOOD	3	Wireless communication quality has a Good evaluation
 MARGINAL	2	Wireless communication quality has a Marginal-Poor evaluation NOT ALLOWED
 BAD	1	Wireless communication quality has a Bad evaluation NO COMMUNICATION

SINGLE SURVEY TESTS' AND GENERAL SURVEY'S FINAL EVALUATION

Consider this example:

Survey 2

▼

TRSL

Add device

Select

Location: TRSL's location

OPT

Location: child device #1 location

Select

MULTI

Location: child device #2 location

Select

BSND

Location: child device #3 location

Select

+

Add expander

✓

Complete survey

The icon at the right of every single survey test indicates its final evaluation:

	GOOD
	MARGINAL
	BAD
	UNKNOWN

The whole survey needs to be given a final evaluation:

1) Press **Complete survey**.

Considering the example above, the whole Survey 2 instance will indicate the worst result of the single tests, in this case **BAD**:

Site 1 - My Surveys

>

Survey 2

+

Add a new survey

Generate site report

2) Perform again the failed test, implementing the adequate corrections.

Survey 2 global instance will achieve again the **UNKNOWN** status.

3) Tap again **Complete survey**.

If all single tests have a final **GOOD** evaluation, Survey 2 global instance will have a **GOOD** rating too.

INIM ELECTRONICS S.R.L. VIA DEI LAVORATORI 10, FRAZIONE CENTOBUCHI, 63076 MONTEPRANDONE, ITALY


30

www.inim.biz

GENERATING REPORTS

Having done a **Complete survey** action:

- 1) From the **FireVibes Survey** main window press **Sites**.
- 2) Tap on the arrow at the left of the desired site's line.
- 3) Tap the **Surveys** option:

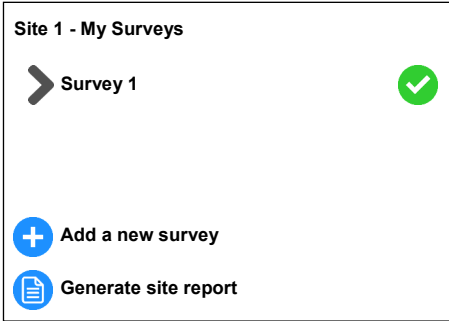

- 4) Tap the **Generate site report** option.
- This generates a single report comprising all the surveys of the site.
- Report is generated in Adobe's Portable Document Format (pdf).



Perform the site's report generation only after having performed a "Complete survey" action.



In order to generate a report, it is not necessary to have all survey tests done (UNKNOWN status) or have all survey tests and the survey global instance evaluated to GOOD.



Open a specific survey report.

Every report starts with the following title:

Site survey report

Site details are given:

Site details

- Name:** Site name.
- Address:** Address of the site.
- Building:** Building number or name.
- Floor:** Floor number.
- Description:** Site's description.
- Surveys:** The name of the surveys attached to the site.

Where:

Name	The name of the installation site.
Address	The address of the installation site.
Building	The building number or name of the installation site.
Floor	The floor number where the installation site is located.
Description	The description of the installation site.
Surveys	The survey's name made in this site.

The **Site high level summary** paragraph gives a summed-up list of the devices of the FireVibes system:

Site high level summary

- 1 INTELLIGENT TRANSLATOR MODULE
- 2 EXPANDER MODULE
- 10 OPTICAL DETECTOR

Refer to appendix B for a correspondence between the report's device indication and its specific commercial model indication.

Link quality legend

GOOD, MARGINAL, BAD, UNKNOWN

Link quality legend is just a reference legend paragraph relating to the wireless link quality between the devices.

Gives you the following indications and colour associations:

GOOD	The wireless link quality is good.	GREEN
MARGINAL	The wireless link quality is on the acceptable limit. If you really can't do nothing to make the link quality GOOD , accept it, but you can have problems.	YELLOW
BAD	Not acceptable wireless link quality.	RED
UNKNOWN	The wireless link quality has not been evaluated yet.	GREY

Colour indications will be used throughout the report.

Channels selection

TX/EXP: Central node, Waiting room

Infrastructure channels: 9-45, 10-46, 11-47, 12-48, 13-49, 14-50, 15-51, 16-52

Device channels: 57-27

Expander: Expander #1, Corridor

Infrastructure channels: 9-45, 10-46, 11-47, 12-48, 13-49, 14-50, 15-51, 16-52

Device channels: 17-53

Recommended infrastructure channels: 9-45

Autodiscovery: available on channel A, B, C

Wake-up link: available

Network channels and device channels analysis is reported in this section.

Survey 3 written in the title above is the name given to the survey.

You have two paragraphs: **Infrastructure channels** and **Device channels**; the first is about the analysis of network channels, the other one is about the analysis of field channels.

TX/EXP: refers to the central node. At its right there is the description given to the central node and its location.

Infrastructure channels

TX/EXP: Central node, Waiting room.

9-45, 10-46, 11-47, 12-48, 13-49, 14-50, 15-51, 16-52

Expander: Expander #1, Office #1.

9-45, 10-46, 11-47, 12-48, 13-49, 14-50, 15-51, 16-52

Recommended infrastructure channels: 9-45

Autodiscovery: available on channel A, B, C

Recommended autodiscovery channel: A

Wake-up link: available

Expander: refers to an expander device. At its right there is the description given to the expander and its location.

Under **TX/EXP** and **Expander** there is a list of scanned channel pairs, each of them coloured with the corresponding link quality colour. In the above example, channel pairs are all green (**GOOD** rating).

Recommended infrastructure channels: this is the channel pair that is best suitable to be used.

Autodiscovery: gives the available channels for the discovery operation and their link quality evaluation. In this example A, B and C in green colour (**GOOD** rating).

Recommended autodiscovery channel: the discovery channel recommended to be used.

Wake-up link: it is possible to use the "wake-up" feature to link the child devices to their network devices.

TX/EXP: refers to the central node. At its right there is the description given to the central node and its location.

Device channels

TX/EXP: Central node, Waiting room.

55-25

Expander: Expander #1, Office #1.

56-26

Expander: refers to an expander device. At its right there is the description given to the expander and its location.

The channel pairs under **TX/EXP:** and **Expander:** refer to the *field channels* (or child device channels) of the network devices.

- Assign a distinct field channel pair to every network device.
- Make sure the channel pair you use has a **GOOD** rating or at least **MARGINAL** (if **GOOD** is not possible). Expect a minor degree of reliability from a **MARGINAL** channel pair (if compared to a **GOOD** one).
As previously said, **MARGINAL** means that the wireless link quality is on the acceptable limit. If you really can't do nothing to make the link quality **GOOD**, accept it, but you can have problems.

Connected devices - link quality summary report on: First survey

This section reports a verbose evaluation of the link quality between the network devices and their respective child devices:

TX/EXP: Central node, Waiting room.	
OPTICAL DETECTOR, Meeting room.	GOOD
OPTICAL DETECTOR, Meeting room #2.	GOOD
OPTICAL DETECTOR, Waiting room.	GOOD
Expander: Expander #1, Office #1.	GOOD
CALL POINT (RED), Meeting room # 3.	GOOD

TX/EXP: refers to the central node. At its right there is the description given to the central node and its location.

Expander: refers to an expander device. At its right there is the description given to the expander and its location.

As seen in this example, every child device has a **GOOD** link quality evaluation with its parent network device; this **GOOD** evaluation is furtherly stressed by the green colour of the link quality indication.

Every child device line has the report's child device indication (see appendix B), its location and the link quality evaluation.

Infrastructure channel selection - detailed report: First survey

This section reports a specific technical wireless evaluation for every system's network device.

icon

CENTRAL NODE

Type: INTELLIGENT TRANSLATOR MODULE

Location: Waiting room

Connected devices: Number of devices connected to network

Where:

Description	The description you entered for the network device.
Type	Appendix B's standard device denomination.
Location	Where the device is located, as you specified in the software.

Follows an evaluation of the network channels:

Infrastructure channels:	9	45
Background noise average:	-119	-120
Background noise variability:	2.367	2.078
Channels:	GOOD	GOOD

Where:

Infrastructure channels	The recommended and best network channels that resulted from the survey.
Background noise average	Wireless background noise average value in dBm.
Background noise variability	Wireless background noise variability value in dBm.
Channels	GOOD, MARGINAL, BAD link quality evaluation for the first and second channel of the pair.

READING REPORTS (CONTINUED)

Device channels: 55 25
Background noise average: -120 -119
Background noise variability: 3.031 8.256
Channels: GOOD GOOD

This is an evaluation of the field / child device's channel pair; this pair is the best one found during the survey. Lines inform you of the following:

Device channels	The recommended and best field / child device's channels that resulted from the survey.
Background noise average	Wireless background noise average value in dBm.
Background noise variability	Wireless background noise variability value in dBm.
Channels	GOOD, MARGINAL, BAD link quality evaluation for the first and second channel of the pair.

Notes:

Date recorded: 25/08/2020 16:24:17

Last in this section:

Date recorded gives the date and time of the recording of the technical wireless evaluation.

Connected devices - link quality detailed report: First survey

This section is about the specific link quality between the FireVibes devices; this means the link quality between the network and their child devices, the central node and its expanders, and the expanders and their child expanders.

General data is given:

 DETECTOR 1

Type: OPTICAL DETECTOR

Location: Waiting room

Connected to: INTELLIGENT TRANSLATOR MODULE - Waiting room

Where:

Description	The description you entered for the device.
Type	Appendix B's standard device denomination.
Location	Where the device is located, as you specified in the software.
Connected to	The parent device and its location.
Number of connected devices	Applies to network devices only: the numerical count of child devices and child expander devices.

READING REPORTS (CONTINUED)

The between-devices' link quality evaluation follows:

Scan results:

RSSI Avg:	-31	RSSI Var:	2.159
Background Avg:	-109	Background Var:	0.815
Packet loss:	0%		
Status:	GOOD		

Where:

RSSI Avg	Average link quality evaluation in dBm units.
RSSI Var	Link quality variation in dBm units.
Background Avg	Background noise average value in dBm units.
Background Var	Background noise variation value in dBm units.
Packet loss	Percentage of lost data packets during the survey.
Status	Link quality's final evaluation.

Last in this section:

Notes:

Date recorded: 25/08/2020 16:36:16

Date recorded gives the date and time of the recording of the technical wireless evaluation.

APPENDIX A - STANDARD CHANNEL PAIRS

In this appendix section you can find the lists of the standard channel pairs used by the FireVibes system.

Field channel pairs	
1	37
2	38
3	39
4	40
5	41
6	42
7	43
8	44
17	53
18	54
55	25
56	26
57	27
58	28
59	29
60	30
61	31
62	32
63	33
64	34
65	35
66	36

Table 4

Network channel pairs	
9	45
10	46
11	47
12	48
13	49
14	50
15	51
16	52

Table 5

APPENDIX B - FIREVIBES DEVICES INDICATIONS IN THE APP AND IN THE REPORTS

The FireVibes Survey app visualizes generic device type codes; these codes correspond to specific commercial device models:

FireVibes Survey's device	Report's device indication
TRSL	INTELLIGENT TRANSLATOR MODULE
C_EXP	CONVENTIONAL EXPANDER MODULE
EXP	EXPANDER MODULE
OPT	OPTICAL DETECTOR
MULTI	MULTICRITERIA DETECTOR
THERM	THERMAL DETECTOR
MCP	CALL POINT (RED)
INP_M	SUPERVISED INPUT MODULE
WSND	WALL SOUNDER
WSND_BW	WALL SOUNDER BEACON
BSND	BASE SOUNDER
BSND_BR	BASE SOUNDER BEACON (RED LIGHT)
BSND_BW	BASE SOUNDER BEACON (WHITE LIGHT)

Table 6